

Description

This 30V 32A, N-Channel MOSFET in a PDFN5*6 Plastic Package.

Applications


Battery Management, High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA, Networking DC-DC Power System, Load Switch.

Features


- Low $R_{DS(on)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance
- Halogen-free Product

V_{DSS}	$R_{DS(on)}$ Typ	I_D
30V	3.7mΩ	32A


Equivalent Circuit & Pinning

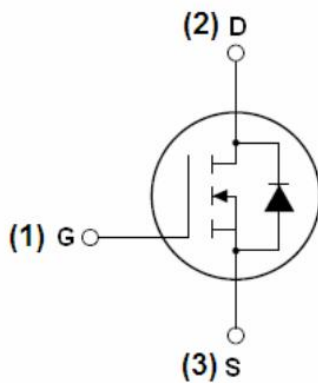

Schematic diagram

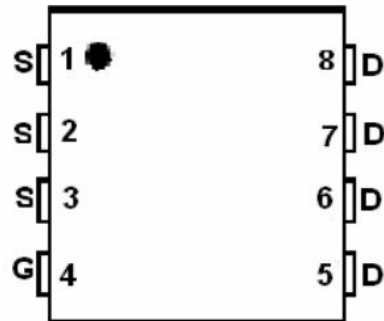

Pin assignment

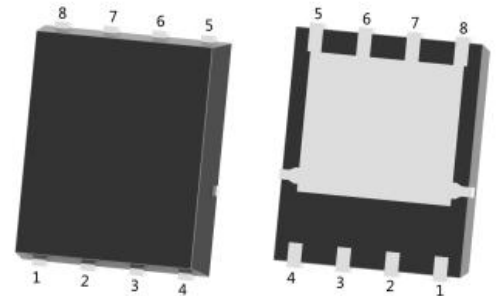

PDFN5X6-8L

Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	30	V
Drain Current - Continuous	I_D	32	A
Drain Current – Pulsed	I_{DM}	128	A
Gate-Source Voltage	V_{GS}	±20	V
Power Dissipation	$P_D(T_c=25^\circ\text{C})$	26	W
Single Pulse Avalanche Energy(L=0.5mH)	E_{AS}	274	mJ
Avalanche Current(L=0.5mH)	I_{AS}	28	A
Junction and Storage Temperature Range	T_j, T_{stg}	-55 to 150	°C
Thermal resistance, junction - ambient	t ≤ 10s	25	°C/W
	Steady-State	55	
Thermal resistance, junction - case	Steady-State	4.8	

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	30	33		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30\text{V}, V_{GS}=0\text{V}$			1.0	uA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			±10 0	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	1	1.5	3	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10\text{V}, I_D=20\text{A}$		3.7	4.5	mΩ
		$V_{GS}=4.5\text{V}, I_D=10\text{A}$		5.1	6	
Diode Forward Voltage	V_{SD}	$I_S=1\text{A}, V_{GS}=0\text{V}$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25\text{V}, V_{GS}=0\text{V}$ $f=1.0\text{MHz}$		2500		pF
Output Capacitance	C_{oss}			280		
Reverse Transfer Capacitance	C_{rss}			210		
Gate resistance	R_g	$V_{GS}=0\text{V}, V_{DS}=0\text{V}$ $f=1\text{MHz}$		3.3		Ω
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10\text{V}, V_{DS}=15\text{V},$ $I_D=20\text{A}$		30		nC
Total Gate Charge	$Q_{g(4.5V)}$			13.5		
Gate Source Charge	Q_{gs}			5.5		
Gate Drain Charge	Q_{gd}			3.5		

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=15V$ $R_L=0.75\Omega$ $R_{GEN}=3\Omega$		8		ns
Turn-On Rise Time	t_r			3		
Turn-Off Delay Time	$t_{d(off)}$			34		
Turn-Off Fall Time	t_f			5.5		

Electrical Characteristic Curve

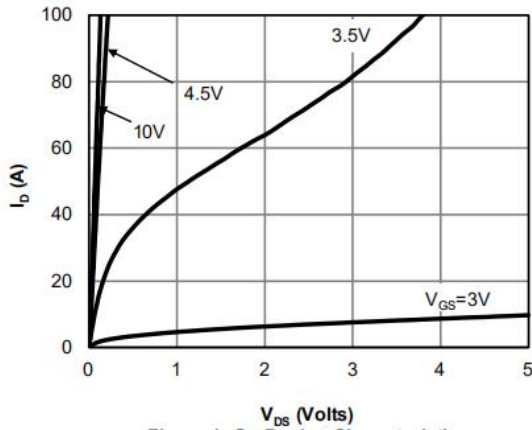


Figure 1: On-Region Characteristics

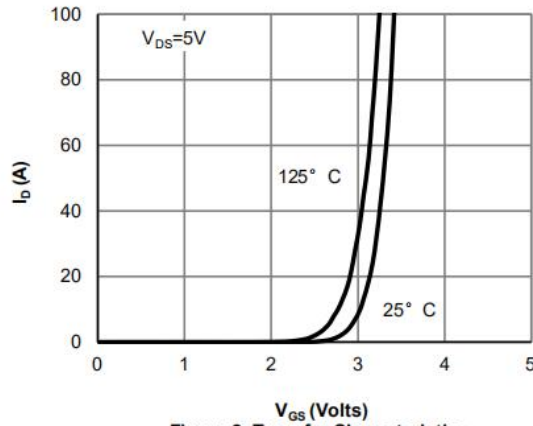


Figure 2: Transfer Characteristics

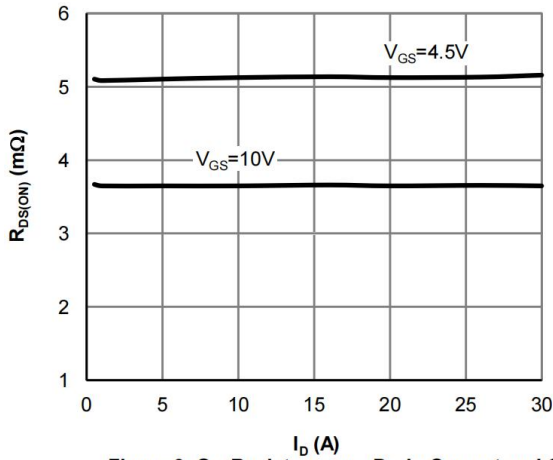


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

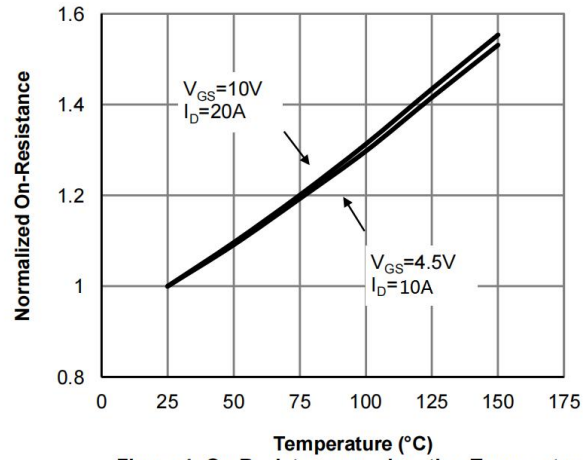


Figure 4: On-Resistance vs. Junction Temperature

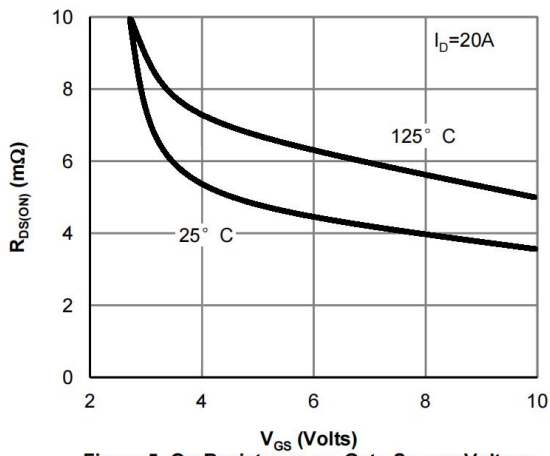


Figure 5: On-Resistance vs. Gate-Source Voltage

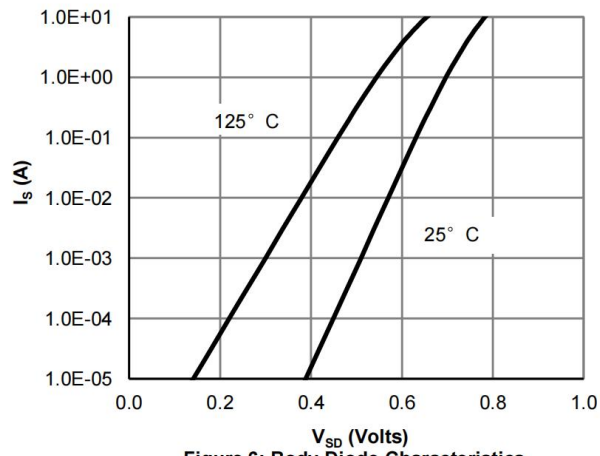


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

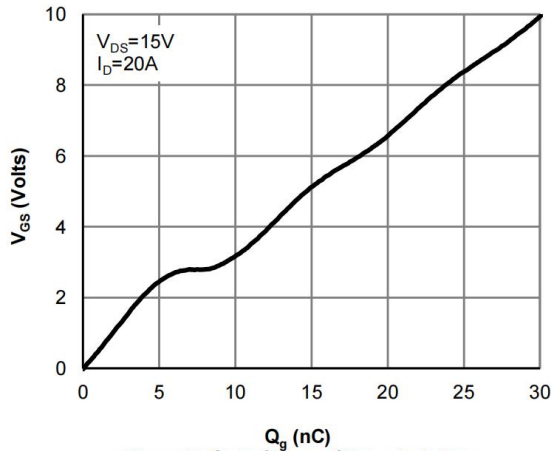


Figure 7: Gate-Charge Characteristics

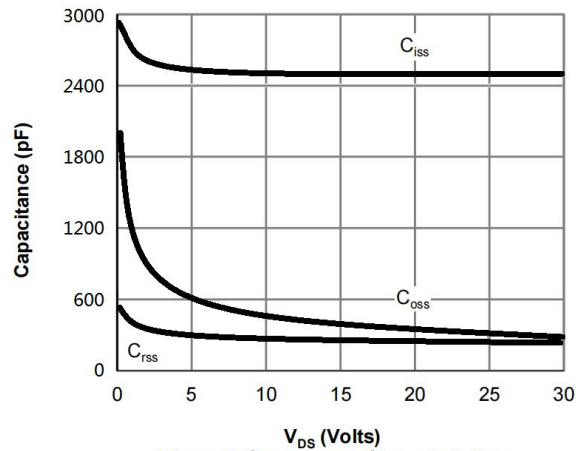


Figure 8: Capacitance Characteristics

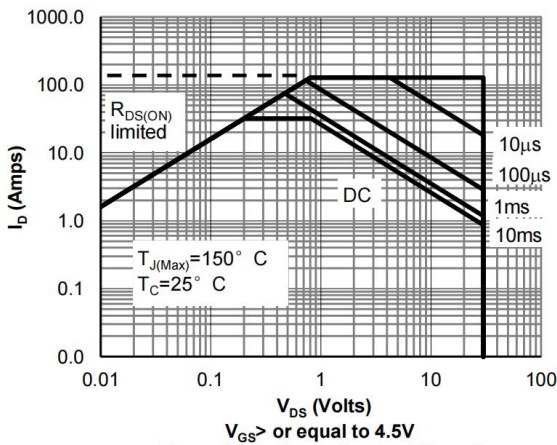


Figure 9: Maximum Forward Biased Safe Operating Area

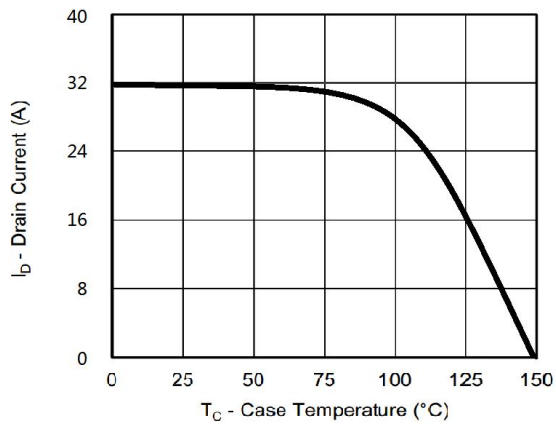


Figure 10: Maximum Continuous Drain Current vs Case Temperature


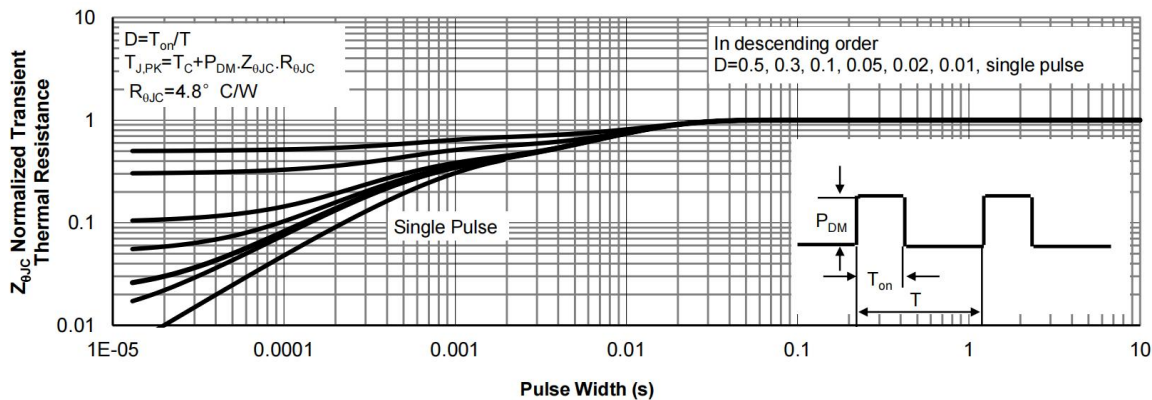


Figure 11: Normalized Maximum Transient Thermal Impedance

Marking Instructions

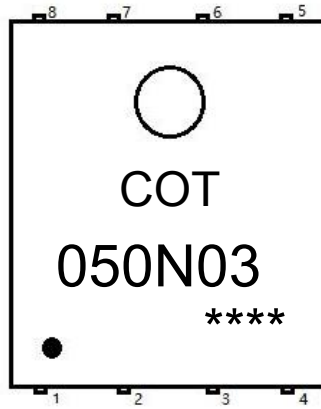

Note:

COT: Company Logo

050N03: Product Type.

****: Lot No. Code, code change with Lot No.

Packaging SPEC.


REEL INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
PDFN5*6	5000	2	10000	6	60000	13" × 12	360 × 360 × 50	380 × 335 × 366

Package Outline Dimensions

PDFN5 X6

Unit:mm

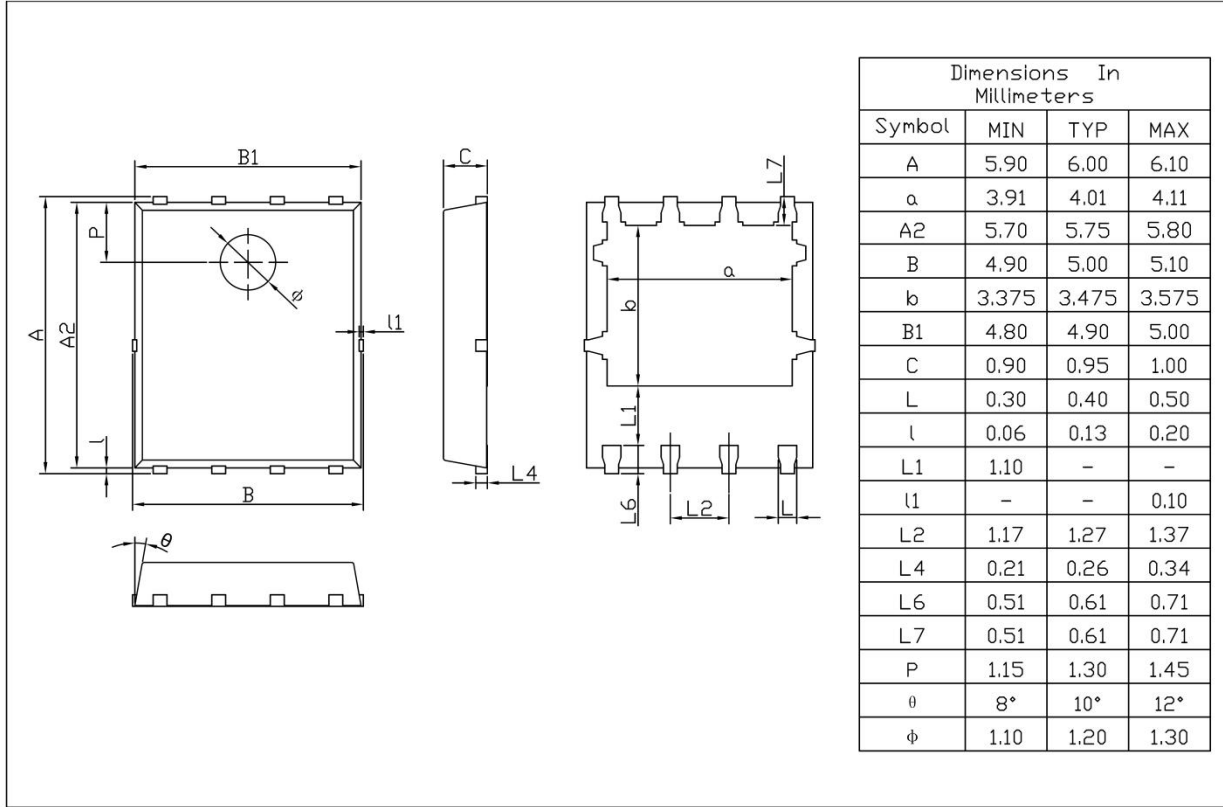

Rev.01 202209