

Description

This 77A, 30V N-Channel MOSFET in a TO-252 Plastic Package.



Features

- Low $R_{DS(on)}$,
- Low gate charge,
- Low C_{iss} ,
- Fast switching.
- Halogen-free Product.

Applications

- Suited for low voltage applications such as automotive
- DC/DC Converters
- And high efficiency switching for power management in portable and battery operated products
- Meet the stringent requirements of automotive applications.

| V_{DSS} | $R_{DS(on)}$ (Typ) | I_D |
|-----------|--------------------|-------|
| 30V | 6.3m Ω | 77A |

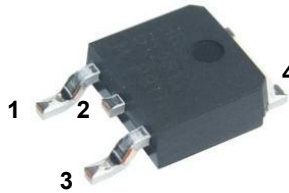Equivalent Circuit & Pinning


PIN 1 : Gate PIN 2 : Drain PIN 3 : Source PIN 4 : Drain

Absolute Maximum Ratings(Ta=25°C)

| Parameter | Symbol | Rating | Unit | |
|--|-----------------------------|-----------------|------|------|
| Drain-Source Voltage | V_{DSS} | 30 | V | |
| Drain Current | $I_D(T_C=25^\circ\text{C})$ | 77 | A | |
| Drain Current - Pulsed | I_{DM} | 165 | A | |
| Gate-Source Voltage | V_{GS} | ± 20 | V | |
| Avalanche Current | I_{AS} | 18.5 | A | |
| Single Pulsed Avalanche Energy(L=0.5mH) | E_{AS} | 136.9 | mJ | |
| Power Dissipation | $P_D(T_C=25^\circ\text{C})$ | 70 | W | |
| Junction and Storage Temperature Range | T_J, T_{STG} | -55 to 150 | °C | |
| Thermal Resistance- Junction to Ambient | $t \leq 10s$ | $R_{\theta JA}$ | 20 | °C/W |
| | Steady-State | | 50 | |
| Thermal Resistance- Junction to Case | Steady-State | $R_{\theta JC}$ | 1.79 | |

Electrical Characteristics(Ta=25°C)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|------------------------------------|---------------|---|-----|------|-----------|------------|
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V \quad I_D=250\mu A$ | 30 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=30V \quad V_{GS}=0V$ | | | 1.0 | μA |
| Gate-Body Leakage Current Forward | I_{GSS} | $V_{GS}=\pm 20V \quad V_{DS}=0V$ | | | ± 100 | nA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS} \quad I_D=250\mu A$ | 1.0 | 1.7 | 2.5 | V |
| Static Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS}=10V \quad I_D=20A$ | | 6.3 | 7 | m Ω |
| | | $V_{GS}=4.5V \quad I_D=10A$ | | 9.5 | 12 | |
| Drain-Source Diode Forward Voltage | V_{SD} | $V_{GS}=0V \quad I_S=1A$ | | 0.72 | 1.4 | V |
| Gate resistance | R_g | $V_{GS}=0V \quad V_{DS}=0V \quad f=1MHz$ | | 3.7 | | Ω |
| Input Capacitance | C_{iss} | $V_{DS}=25V \quad V_{GS}=0V \quad f=1.0MHz$ | | 1170 | | pF |
| Output Capacitance | C_{oss} | | | 110 | | |
| Reverse Transfer Capacitance | C_{rss} | | | 100 | | |
| Total Gate Charge | $Q_{g(10V)}$ | $V_{GS}=10V \quad V_{DS}=15V \quad I_D=20A$ | | 40 | | nC |
| Total Gate Charge | $Q_{g(4.5V)}$ | | | 22 | | |
| Gate Source Charge | Q_{gs} | | | 11 | | |
| Gate Drain Charge | Q_{gd} | | | 5 | | |

Electrical Characteristics(Ta=25°C)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---------------------|--------------|---|-----|-----|-----|------|
| Turn-On Delay Time | $t_{d(on)}$ | $V_{GS}=10V$ $V_{DS}=15V$ $R_L=0.75\Omega$ $R_{GEN}=3\Omega$ | | 11 | | ns |
| Turn-On Rise Time | t_r | | | 14 | | |
| Turn-Off Delay Time | $t_{d(off)}$ | | | 38 | | |
| Turn-Off Fall Time | t_f | | | 10 | | |

Electrical Characteristic Curve

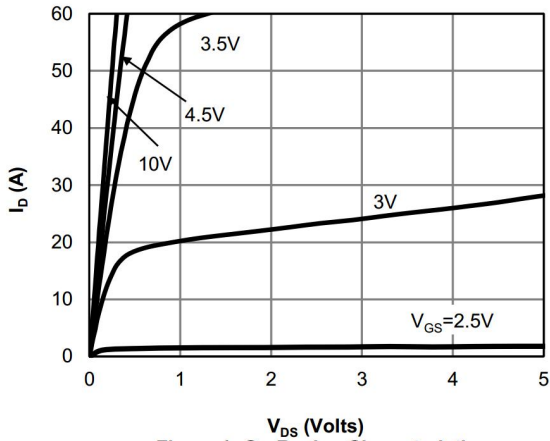


Figure 1: On-Region Characteristics

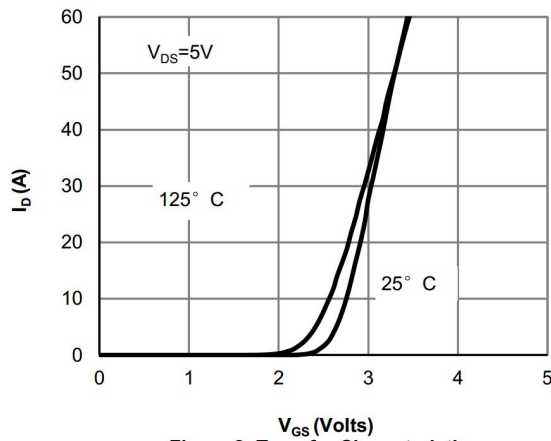


Figure 2: Transfer Characteristics

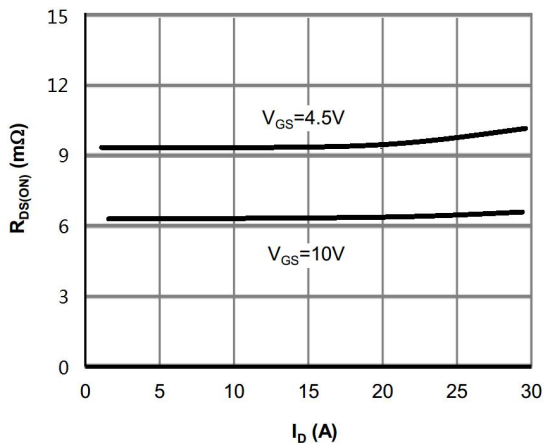


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

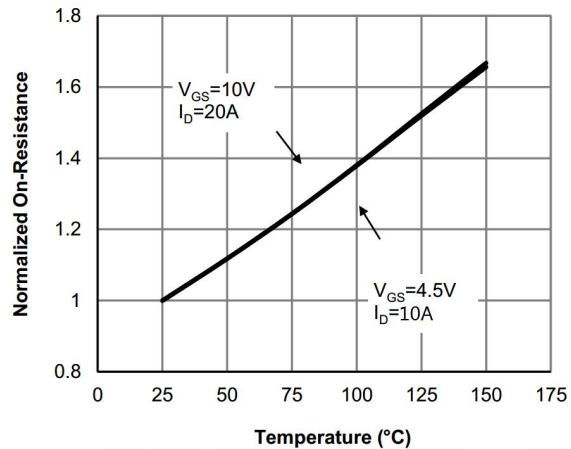


Figure 4: On-Resistance vs. Junction Temperature

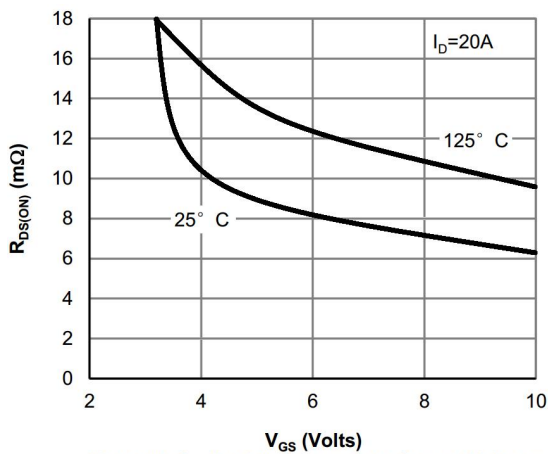


Figure 5: On-Resistance vs. Gate-Source Voltage

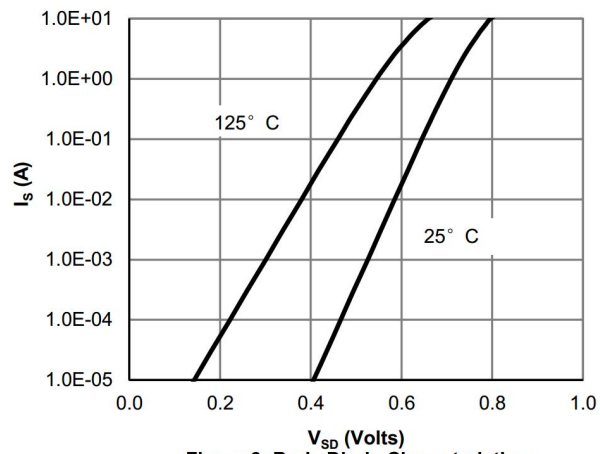


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

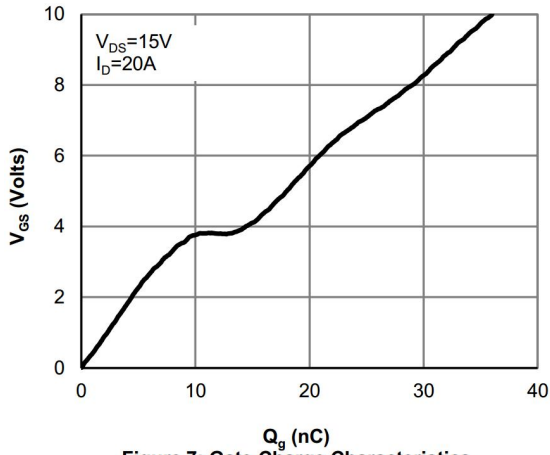


Figure 7: Gate-Charge Characteristics

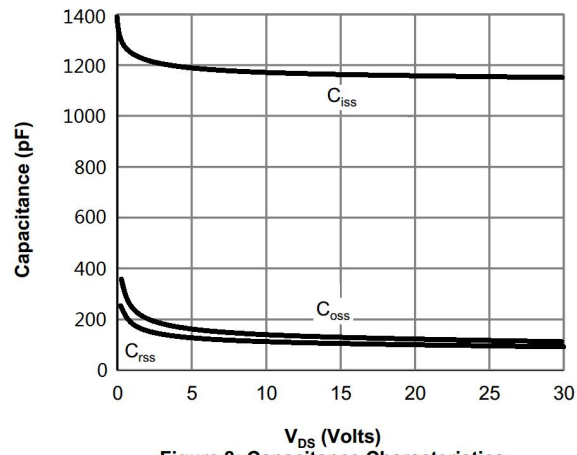


Figure 8: Capacitance Characteristics

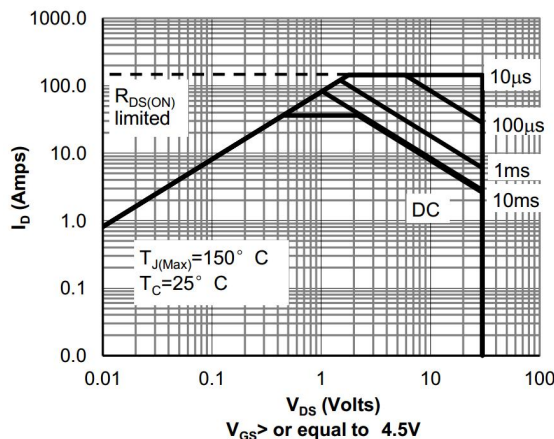


Figure 9: Maximum Forward Biased Safe Operating Area

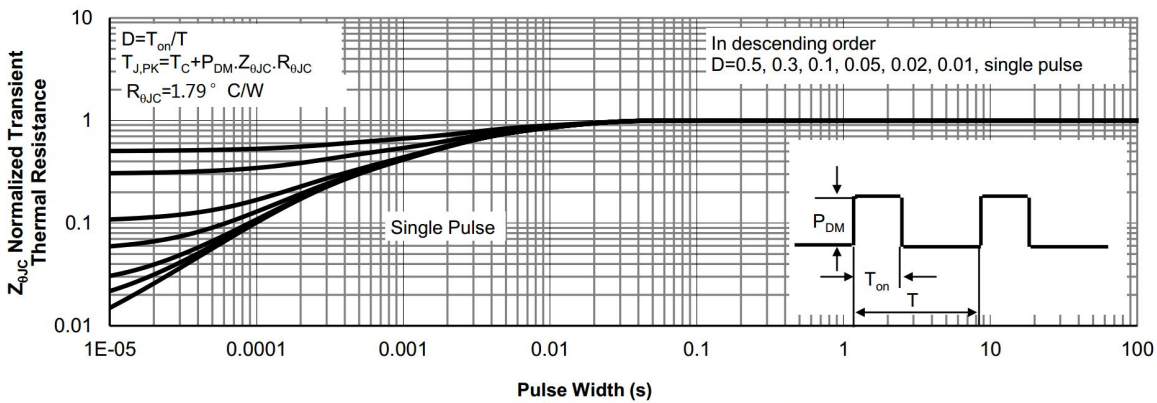


Figure 10: Normalized Maximum Transient Thermal Impedance

Marking Instructions



Note:

COT: Company Logo

070N03: Product Type.

****: Lot No. Code, code change with Lot No.

Packaging SPEC.


REEL INFORMATION

| Package Type | Units | | | | | Dimension (unit: mm ³) | | |
|--------------|------------|-----------------|-----------------|-----------------------|-----------------|------------------------------------|------------|-------------|
| | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel | Inner Box | Outer Box |
| TO-252 | 2,500 | 2 | 5,000 | 6 | 30,000 | 13" x16 | 360x360x50 | 380x335x366 |

TUBE INFORMATION

| Package Type | Units | | | | | Dimension (unit: mm ³) | | |
|--------------|------------|-----------------|-----------------|-----------------------|-----------------|------------------------------------|------------|-------------|
| | Units/Tube | Tubes/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Tube | Inner Box | Outer Box |
| TO-252 | 75 | 48 | 3,600 | 5 | 18,000 | 526x20.5x5.25 | 555x164x50 | 575x290x180 |

Package Outline Dimensions

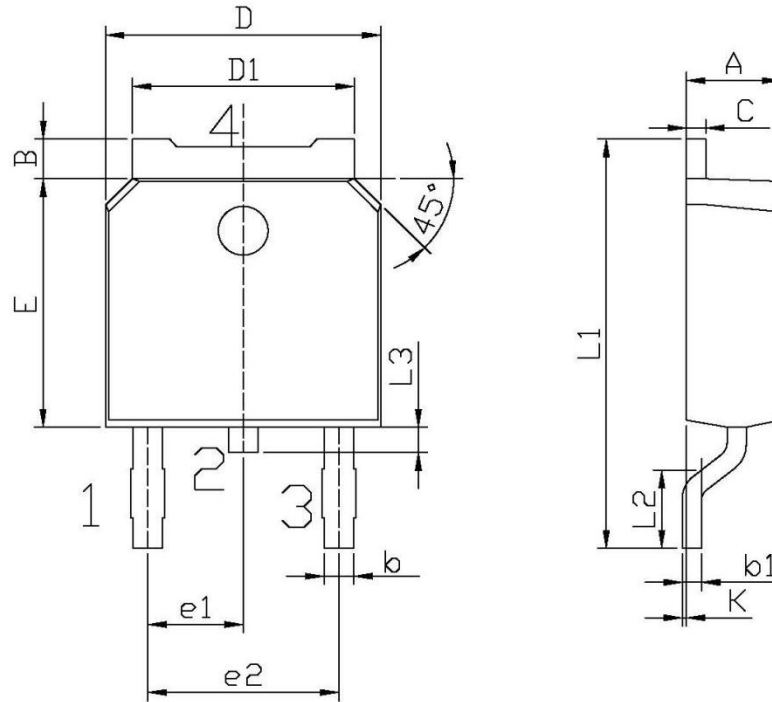

单位: mm

| Symbol | Dimensions In Millimeters | | Symbol | Dimensions In Millimeters | |
|--------|---------------------------|------|--------|---------------------------|-------|
| | Min | Max | | Min | Max |
| A | 2.20 | 2.40 | E | 5.95 | 6.25 |
| B | 0.95 | 1.25 | e1 | 2.24 | 2.34 |
| b | 0.70 | 0.90 | e2 | 4.43 | 4.73 |
| b1 | 0.45 | 0.55 | L1 | 9.85 | 10.35 |
| C | 0.45 | 0.55 | L2 | 1.70 | 2.00 |
| D | 6.45 | 6.75 | L3 | 0.60 | 0.90 |
| D1 | 5.10 | 5.50 | K | 0.00 | 0.10 |

TO-252