

Descriptions

N-Channel MOSFET in a TO-220FL Plastic Package.


Features

- $V_{DS} = 500V$ $I_D = 24A$
- $R_{DS(ON)}@10V \leq 0.25 \Omega$ (Typ. 0.17Ω)
- $R_{DS(ON)}@6V \leq 0.3 \Omega$ (Typ. $0.18m \Omega$)


Applications

- Designed for high voltage.
- High speed power switching applications such as high efficiency switched mode power supplies.
- Active power factor correction.

Equivalent Circuit

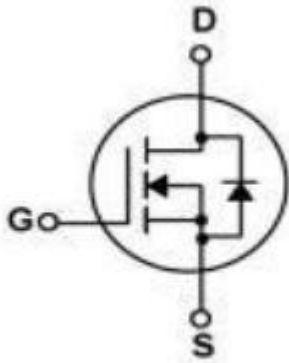

Pinning



PIN1: G PIN 2: D PIN 3: S

Marking

See Marking Instructions







Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Drain-to-Source Breakdown Voltage	V_{DS}	500	V
Continuous Drain Current	$I_D(T_c=25^\circ\text{C})$	24	A
Drain Current Pulsed	I_{DM}	90	A
Gate-to-Source Voltage	V_{GS}	± 30	V
Avalanche Current	I_{AS}	21	A
Single Pulse Avalanche Energy	E_{AS}	1960	mJ
Power Dissipation	$P_D(T_c=25^\circ\text{C})$	50	W
Junction Temperature Range	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~150	$^\circ\text{C}$
Thermal Resistance Junction-Case	$R_{\theta JC}$	2.5	$^\circ\text{C/W}$



Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-to-Source Breakdown Voltage	V_{DS}	$V_{GS}=0V$ $I_D=250\mu A$	500	550		V
Drain-to-Source Leakage Current	I_{DSS}	$V_{DS}=500V$ $V_{GS}=0V$			1.0	μA
Gate-to-Source Forward Leakage	I_{GSS}	$V_{GS}=\pm 30V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.0		4.0	V
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=12A$		0.17	0.25	Ω
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=6V$ $I_D=6A$		0.18	0.3	Ω
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_{SD}=24A$			1.4	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		4364		pF
Output Capacitance	C_{oss}			311		
Reverse Transfer Capacitance	C_{rss}			138		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=250V$ $I_D=24A$ $R_G=10\Omega$		28.8		ns
Rise Time	t_r			5.6		
Turn-Off Delay Time	$t_{d(off)}$			106.4		
Fall Time	t_f			9.6		
Total Gate Charge	Q_g	$V_{DS}=400V$ $I_D=24A$ $V_{GS}=10V$		214		nC
Gate-Source Charge	Q_{gs}			104		
Gate-Drain Charge	Q_{gd}			19		


Electrical Characteristic Curve

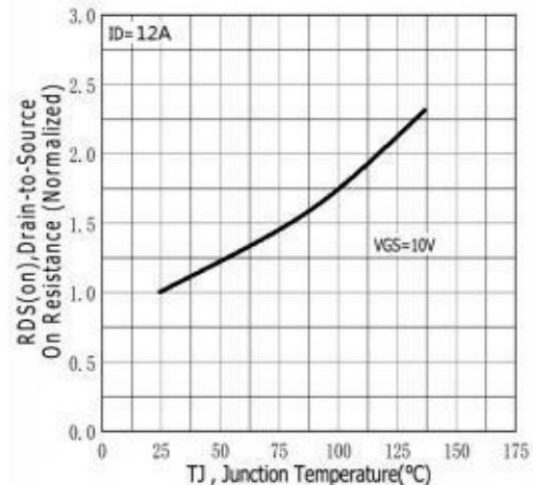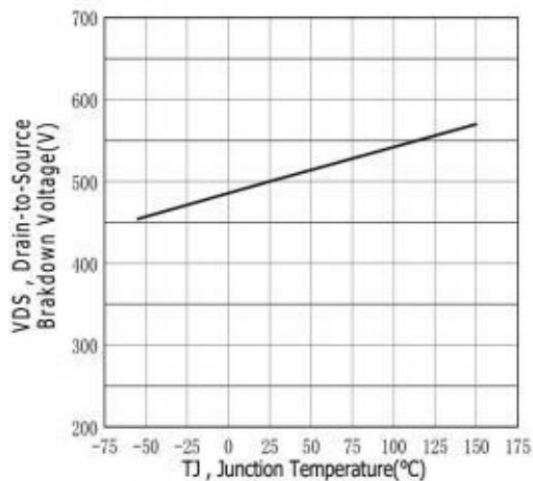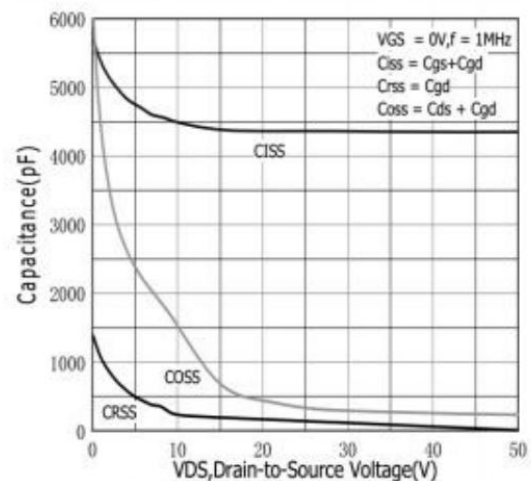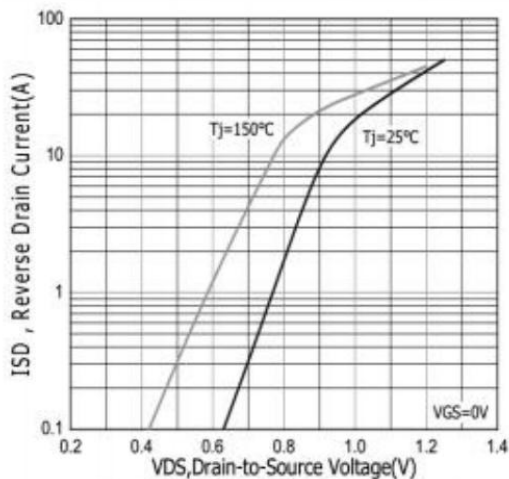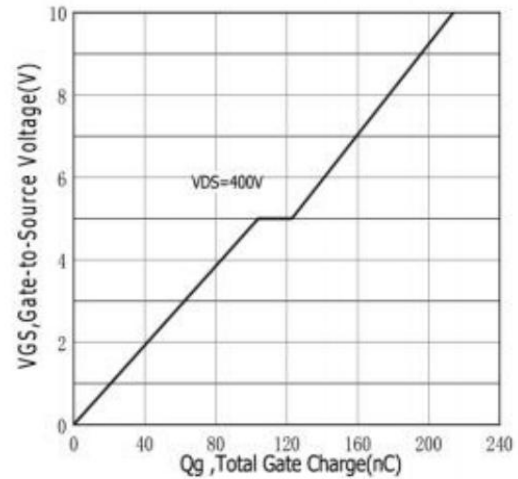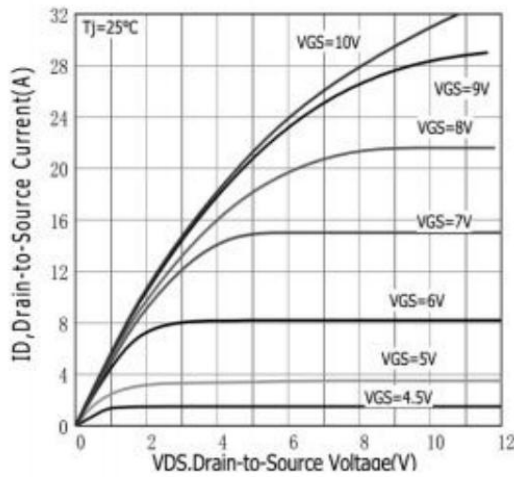

Electrical Characteristic Curve

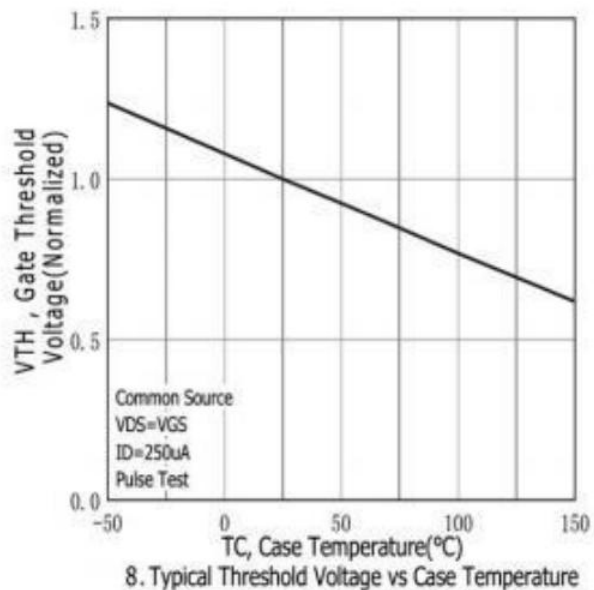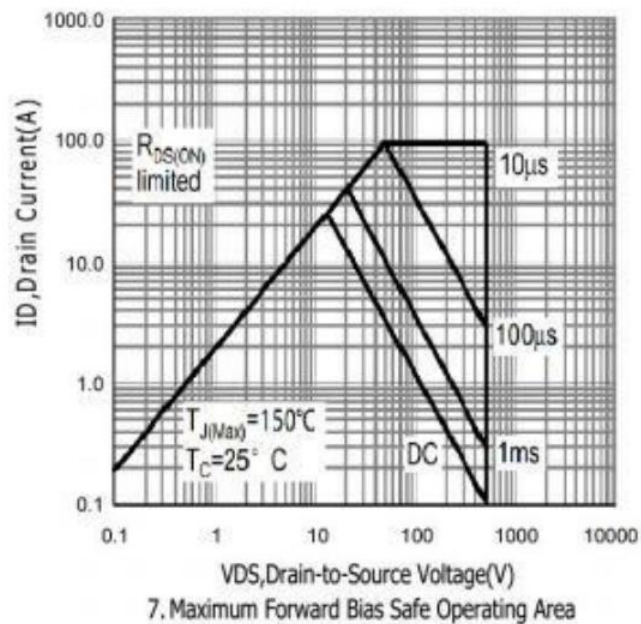

Marking Instructions

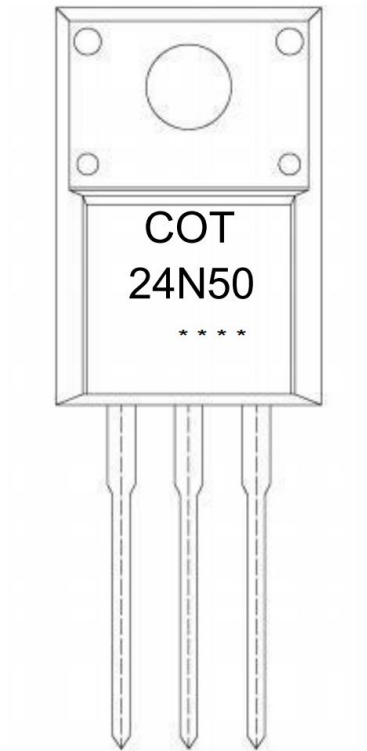

Note:
COT: Company Code
24N50: Product Type.
****: Lot No. Code, code change with Lot No.

Packaging SPEC

TUBE INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-220FL	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

Package Outline Dimensions

TO-220FL

单位: mm

