

Description

This 80A, 60V N-Channel MOSFET in a TO-252 Plastic Package.

Features



- Low $R_{DS(on)}$,
- Low gate charge,
- Low C_{iss} ,
- Fast switching.
- Halogen-free Product.

Applications

- Suited for low voltage applications such as automotive
- DC/DC Converters
- And high efficiency switching for power management in portable and battery operated products.

V_{DSS}	$R_{DS(on)}$ (Typ)	I_D
60V	11m Ω	80A

Equivalent Circuit & Pinning



PIN1 : Gate PIN 2 : Drain PIN 3 : Source PIN 4 : Drain

Absolute Maximum Ratings(Ta=25℃)

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	60	V
Drain Current		$I_D(T_c=25^{\circ}\text{C})$	80	A
Drain Current		$I_D(T_c=100^{\circ}\text{C})$	65.6	A
Drain Current - Pulsed		I_{DM}	240	A
Gate-Source Voltage		V_{GS}	± 20	V
Avalanche Energy		E_{AS}	215	mJ
Avalanche Current		I_{AS}	23.2	A
Power Dissipation		$P_D(T_c=25^{\circ}\text{C})$	75	W
Junction Temperature Range		T_j	150	℃
Storage Temperature Range		T_{stg}	-55~150	℃
Maximum Junction-to-Ambient	$t \leq 10s$	$R_{\theta JA}$	15	℃/W
Maximum Junction-to-Ambient	Steady-State		60	
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	1.6	

Electrical Characteristics(Ta=25℃)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250\mu A$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V$ $V_{GS}=0V$			1.0	μA
		$V_{DS}=48V$ $T_C=150^{\circ}\text{C}$			10	
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1	1.7	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=60A$		11	13	mΩ
		$V_{GS}=4.5V$ $I_D=30A$		16	20	
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$		0.67	1.5	V

Electrical Characteristics(Ta=25℃)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Capacitance	C_{iss}	$V_{DS}=25V \quad V_{GS}=0V$ $f=1.0MHz$		2570		pF
Output Capacitance	C_{oss}			152		
Reverse Transfer Capacitance	C_{rss}			74		
Gate resistance	R_g	$V_{GS}=0V \quad V_{DS}=0V$ $f=1MHz$		1.2		Ω
Total Gate Charge	$Q_g(10V)$	$V_{GS}=-10V \quad V_{DS}=30V$ $I_D=20A$		20.6		nC
Total Gate Charge	$Q_g(4.5V)$			8.5		
Gate Source Charge	Q_{gs}			5		
Gate Drain Charge	Q_{gd}			2.2		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V \quad V_{DS}=30V$ $R_L=1.5\Omega \quad R_{GEN}=3\Omega$		8.5		ns
Turn-On Rise Time	t_r			3.5		
Turn-Off Delay Time	$t_{d(off)}$			27		
Turn-Off Fall Time	t_f			3		
Body Diode Reverse Recovery Time	t_{rr}	$I_F=20A \quad dI/dt=500A/ms$		19		ns
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F=20A \quad dI/dt=500A/ms$		69.5		nC

Electrical Characteristic Curve

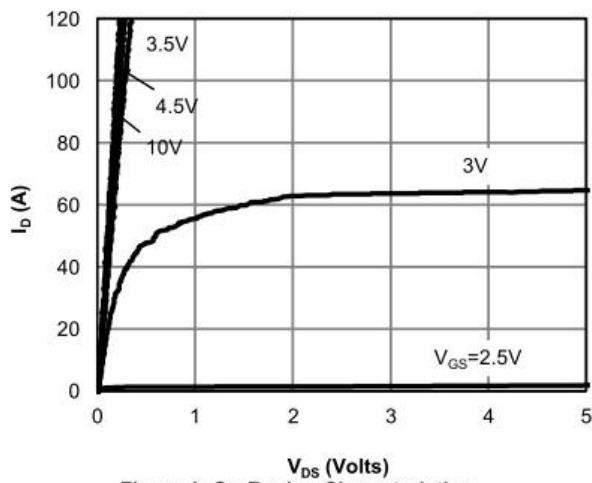


Figure 1: On-Region Characteristics

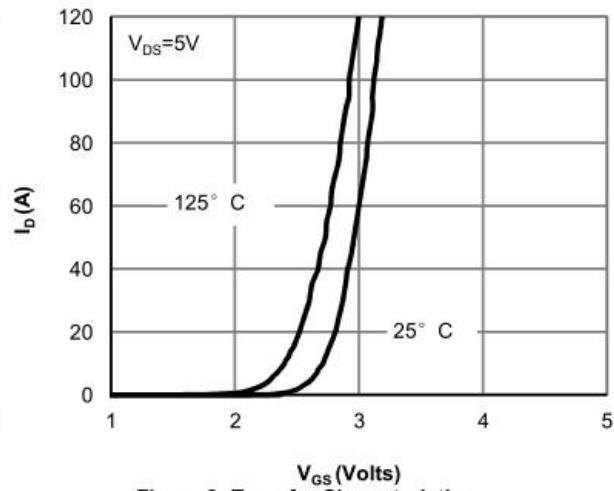


Figure 2: Transfer Characteristics

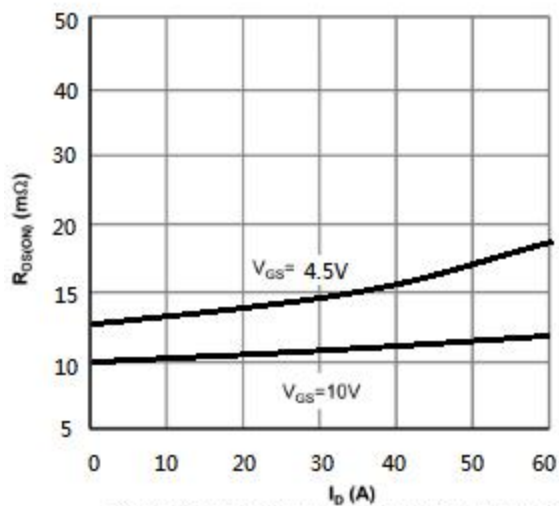


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

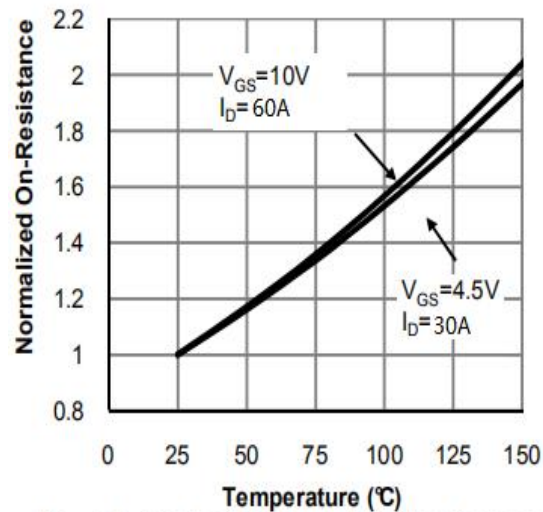


Figure 4: On-Resistance vs. Junction Temperature

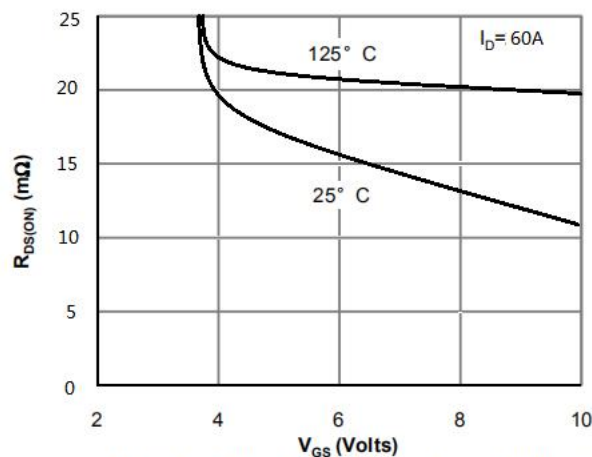


Figure 5: On-Resistance vs. Gate-Source Voltage






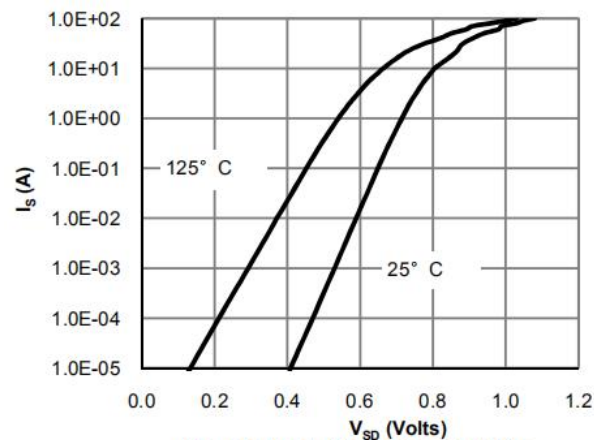


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

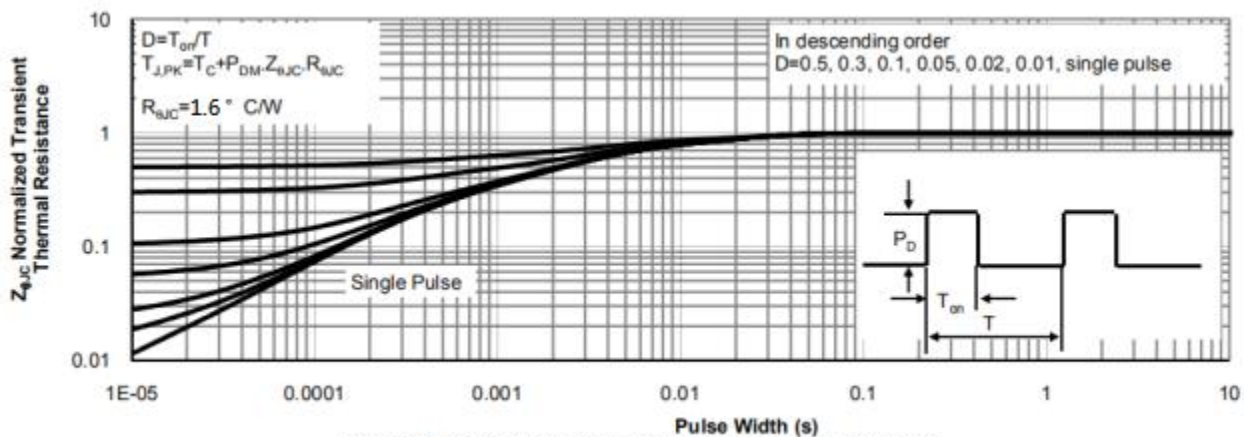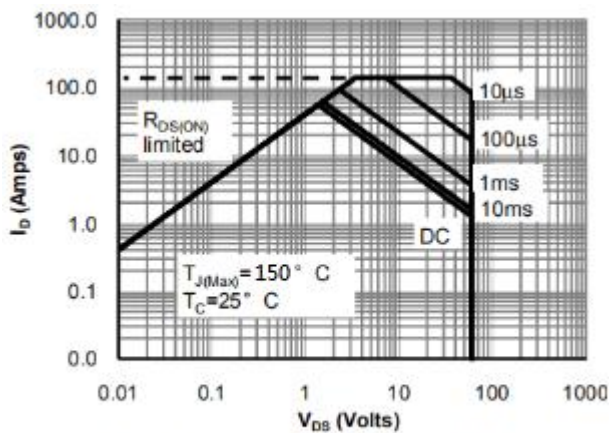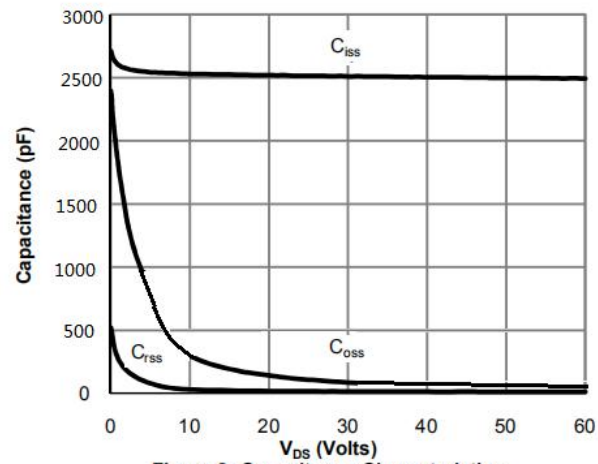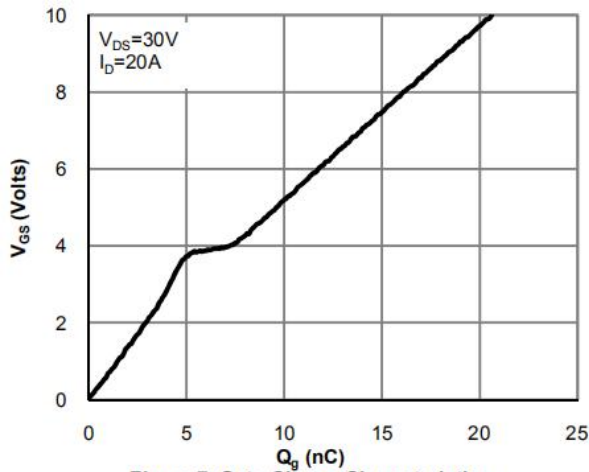

Marking Instructions

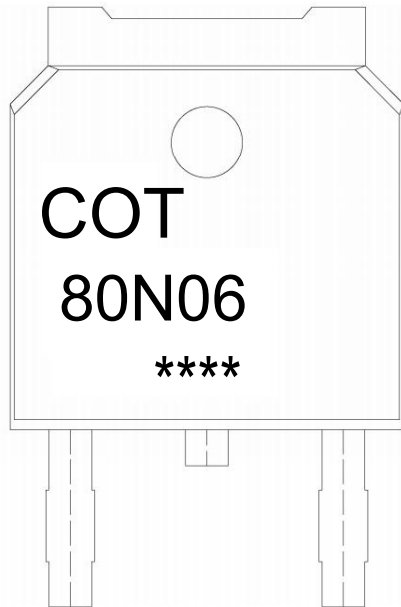

Note:

COT: Company Logo

80N06: Product Type.

****: Lot No. Code, code change with Lot No.

Packaging SPEC.


REEL INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

TUBE INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

Package Outline Dimensions

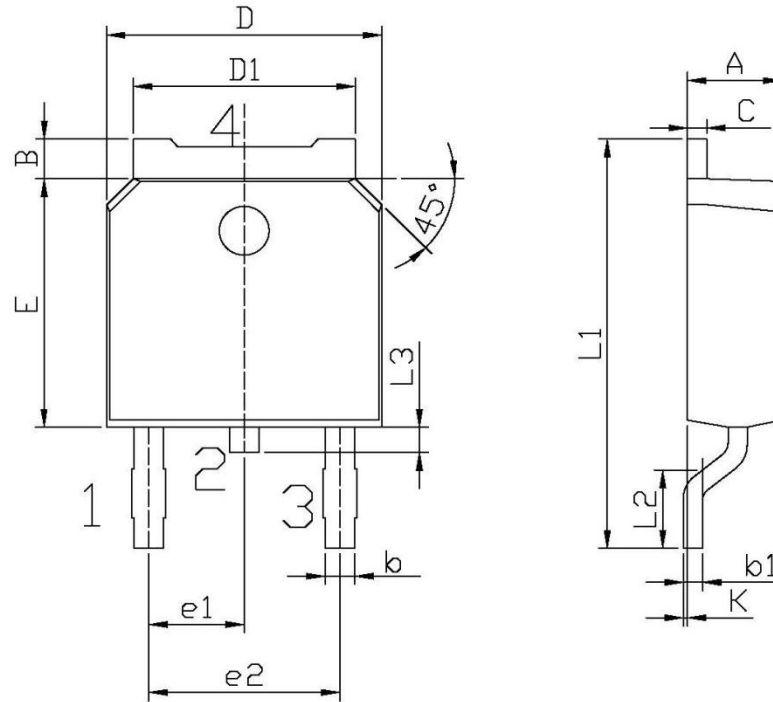

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

TO-252