

Description

This 15A, 100V N-Channel MOSFET in a TO-252 Plastic Package.

Features



- Low $R_{DS(on)}$,
- Low gate charge,
- Low C_{iss} ,
- Fast switching.
- Halogen-free Product.

Applications

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.

V_{DSS}	$R_{DS(on)}$ Type	I_D
100V	75mΩ	15A

Equivalent Circuit & Pinning



PIN1 : Gate

PIN 2 : Drain

PIN 3 : Source

PIN 4 : Drain

Absolute Maximum Ratings(Ta=25°C)

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	100	V
Drain Current		$I_D(T_c=25^{\circ}\text{C})$	15	A
Drain Current		$I_D(T_c=100^{\circ}\text{C})$	10	A
Drain Current - Pulsed*		I_{DM}	45	A
Gate-Source Voltage		V_{GS}	± 20	V
Single Pulsed Avalanche Energy		E_{AS}	90	mJ
Avalanche Current		I_{AS}	9.1	A
Power Dissipation		$P_D(T_c=25^{\circ}\text{C})$	39	W
Operating and Storage Temperature Range		T_j T_{stg}	-55~150	°C
Junction-to-Ambient	$t \leq 10\text{s}$	$R_{\theta JA}$	20	°C/W
Junction-to-Ambient	Steady-State		50	
Junction-to-Case	Steady-State		3.2	

*Repetitive rating; pulse width limited by max. junction temperature.

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Type	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	100			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100V$ $V_{GS}=0V$			1.0	μA
		$T_J=125^\circ C$			50	
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1	1.9	3	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=8.5A$		75	90	m Ω
		$T_J=125^\circ C$		142		
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=15A$		1.0	1.2	V
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		1.3		Ω
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		250		pF
Output Capacitance	C_{oss}			125		pF
Reverse Transfer Capacitance	C_{rss}			20		pF
Total Gate Charge(10V)	Q_g	$V_{GS}=10V$ $V_{DS}=50V$ $I_D=5A$		5.8		nC
Total Gate Charge(4.5V)	Q_g			2.8		nC
Gate Source Charge	Q_{gs}			1.1		nC
Gate Drain Charge	Q_{gd}			1.2		nC
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=10\Omega$ $R_{GEN}=3\Omega$		6		ns
Turn-On Rise Time	t_r			2.5		ns
Turn-Off Delay Time	$t_{d(off)}$			18		ns
Turn-Off Fall Time	t_f			2.5		ns

Electrical Characteristic Curve

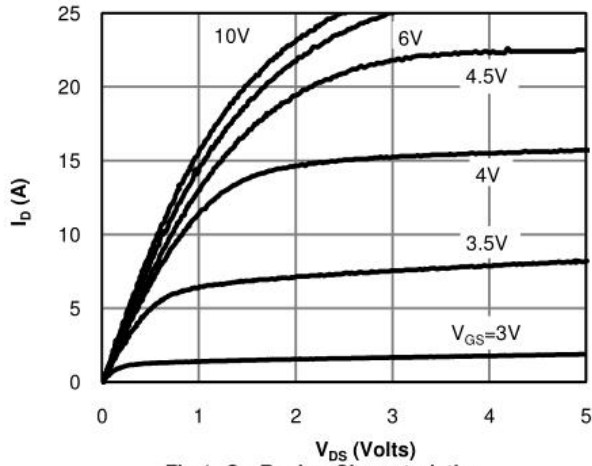


Fig 1: On-Region Characteristics

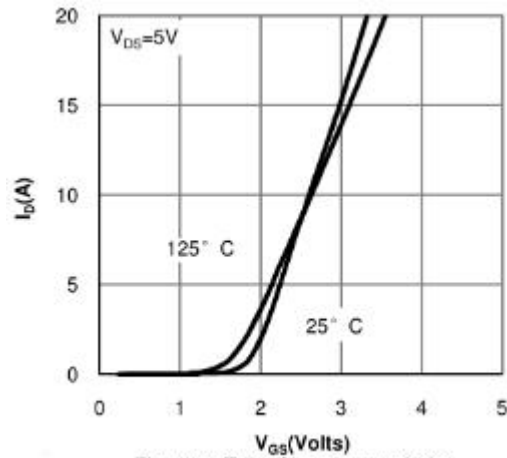


Figure 2: Transfer Characteristics

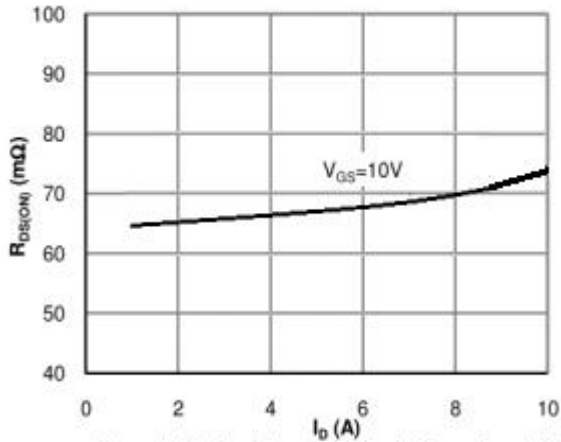


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

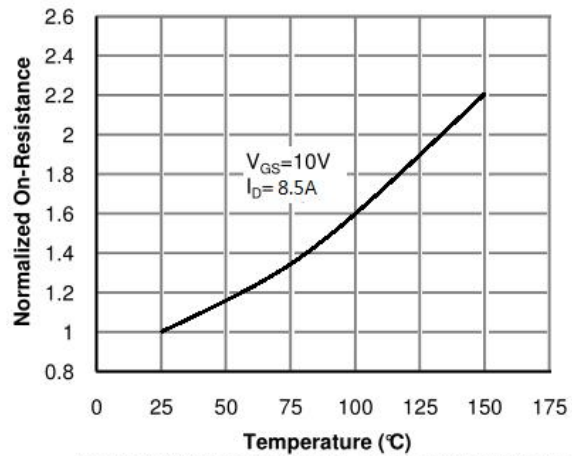


Figure 4: On-Resistance vs. Junction Temperature

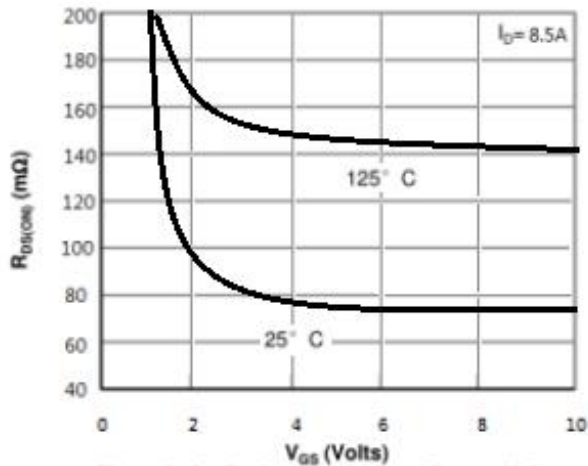


Figure 5: On-Resistance vs. Gate-Source Voltage

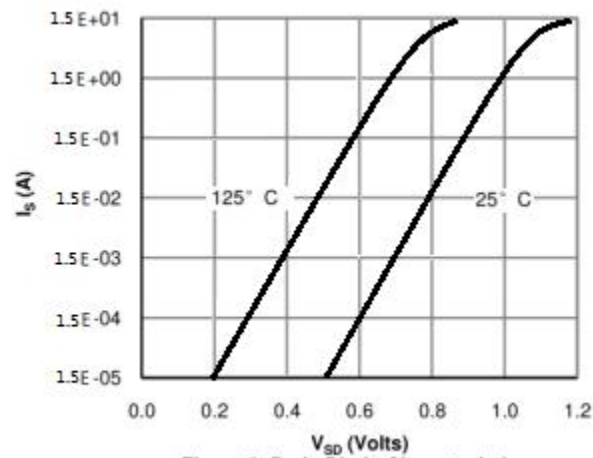


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

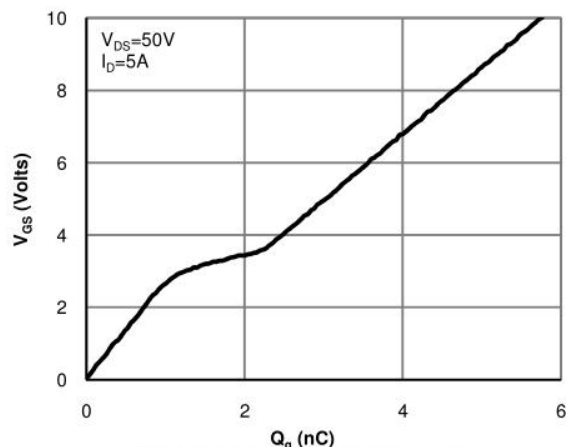


Figure 7: Gate-Charge Characteristics

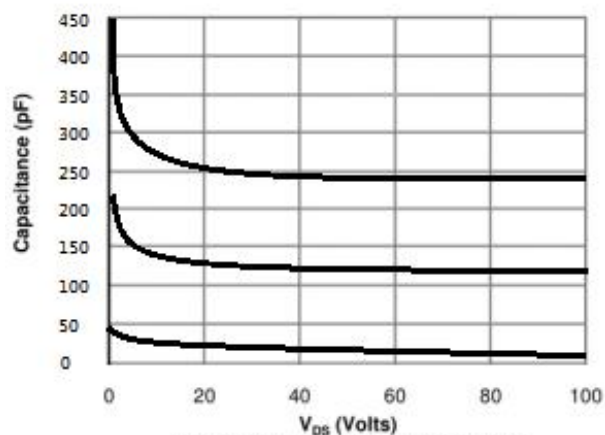


Figure 8: Capacitance Characteristics

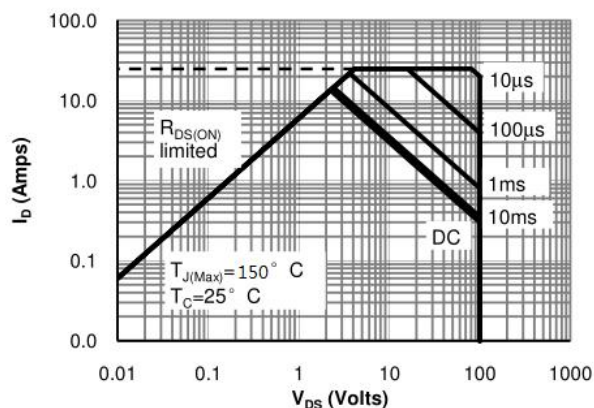


Figure 9: Maximum Forward Biased Safe Operating Area


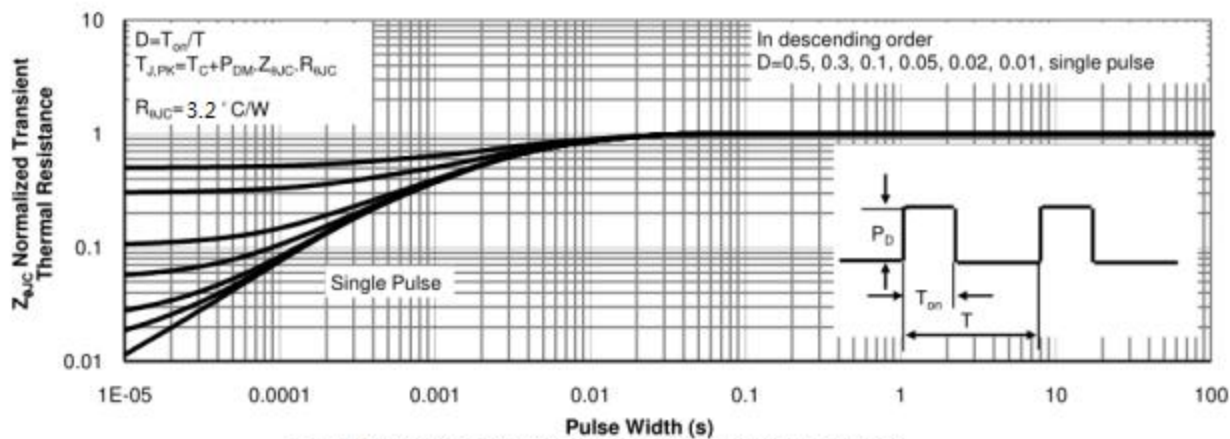


Figure 10 : Normalized Maximum Transient Thermal Impedance

Marking Instructions

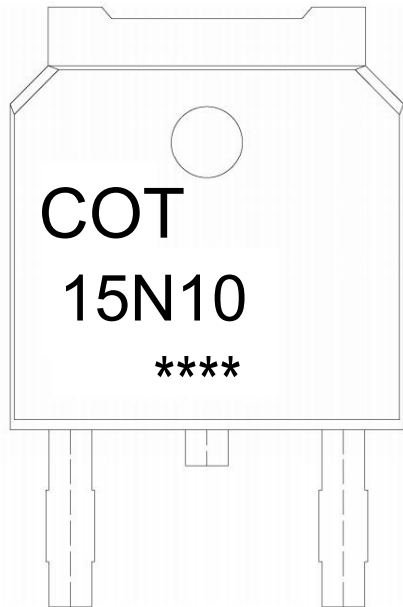

Note:

COT: Company Logo

15N10: Product Type.

****: Lot No. Code, code change with Lot No.

Packaging SPEC.


REEL INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

TUBE INFORMATION

Package Type	Units					Dimension (unit: mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

Package Outline Dimensions

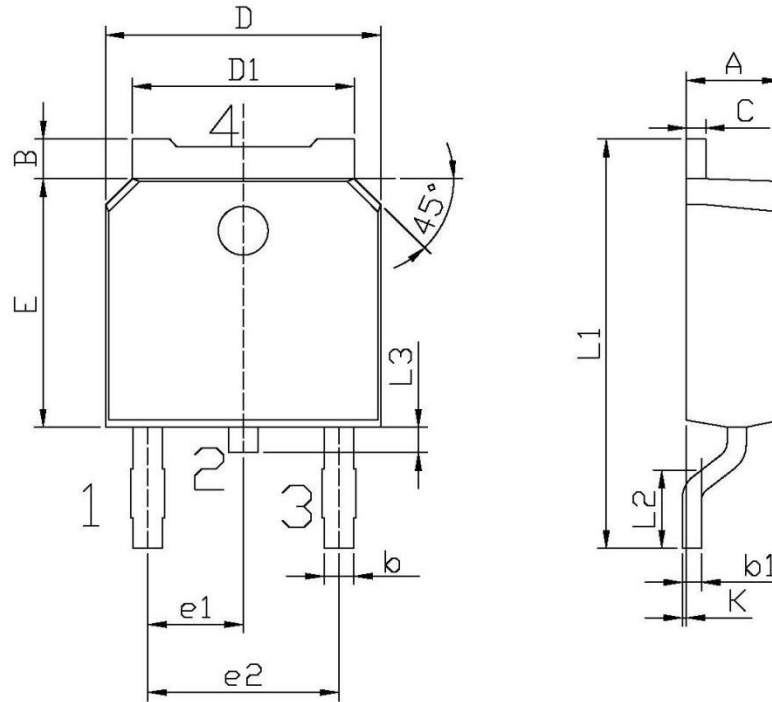

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

TO-252