

Description

This 100V 168A N-Channel mosfet in a PDFN5×6 Plastic Package.

Applications



- Battery management,high frequency point-of-load synchronous buck converter for MB/NB/UMPC/VGA,networking DC-DC power system,load switch

Features

- Low RDS(ON) to minimize conductive loss
- low Gate Charge for fast switching
- Low Thermal resistance
- Halogen Free Product

V_{DSS}	$R_{DS(ON)}$ Typ	I_D
100 V	3.5 mΩ	168 A

Equivalent Circuit & Pinning

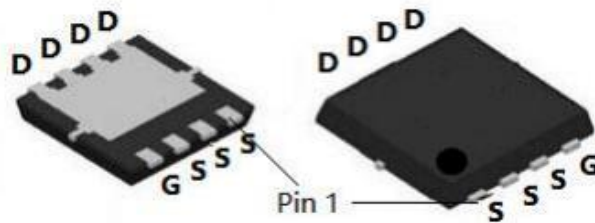

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

PIN1、 2、 3: S PIN4: G PIN5、 6、 7、 8: D

Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	100	V
Drain Current - Continuous	I_D	168	A
Drain Current – Pulsed	I_{DM}	400	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	$P_D(T_c=25^\circ C)$	215	W
Single Pulse Avalanche Energy(L=0.5mH)	E_{AS}	563	mJ
Avalanche Current(L=0.5mH)	I_{AS}	37.5	A
Junction and Storage Temperature Range	T_j, T_{stg}	-55 to 150	°C
Thermal resistance, junction - ambient	$t \leq 10s$	20	°C/W
	Steady-State	50	
Thermal resistance, junction - case	Steady-State	0.58	

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	100	112		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100V, V_{GS}=0V$			1	μA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	2.9	4	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=20A$		3.5	4.0	m Ω
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$		5550		pF
Output Capacitance	C_{oss}			2050		
Reverse Transfer Capacitance	C_{rss}			180		
Gate resistance	R_g	$V_{GS}=0V, V_{DS}=0V, f=1MHz$		1.7		Ω
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V, V_{DS}=50V, I_D=20A$		70		nC
Gate Source Charge	Q_{gs}			20		
Gate Drain Charge	Q_{gd}			10		

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=2.5\ \Omega$ $R_{GEN}=3\ \Omega$		19		ns
Turn-On Rise Time	t_r			8		
Turn-Off Delay Time	$t_{d(off)}$			32		
Turn-Off Fall Time	t_f			11		

Electrical Characteristic Curve

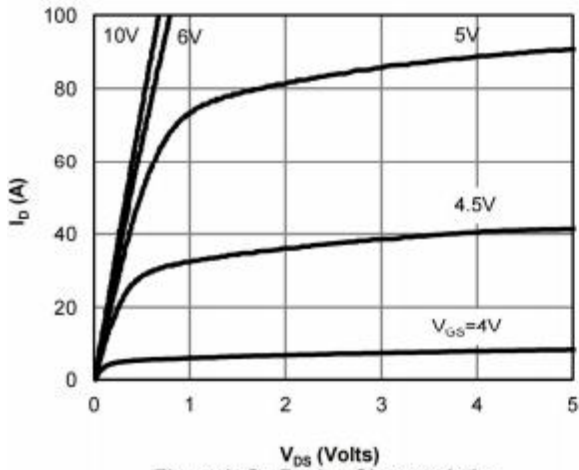


Figure 1: On-Region Characteristics

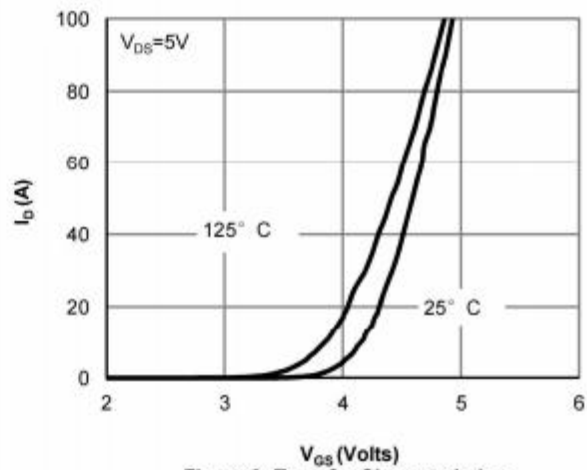


Figure 2: Transfer Characteristics

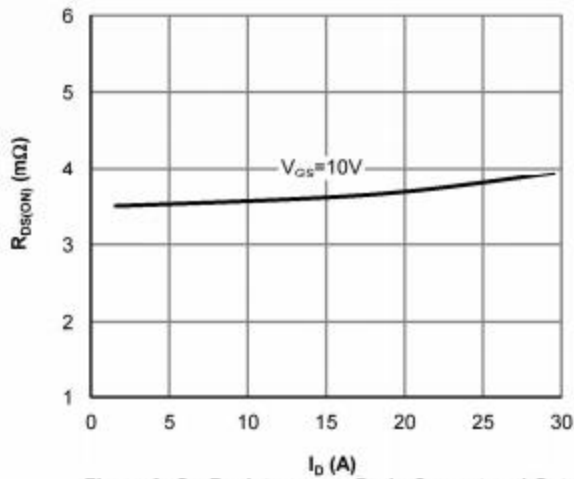


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

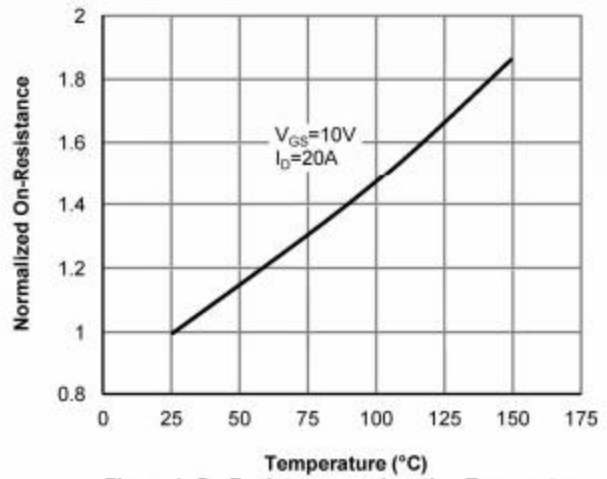


Figure 4: On-Resistance vs. Junction Temperature

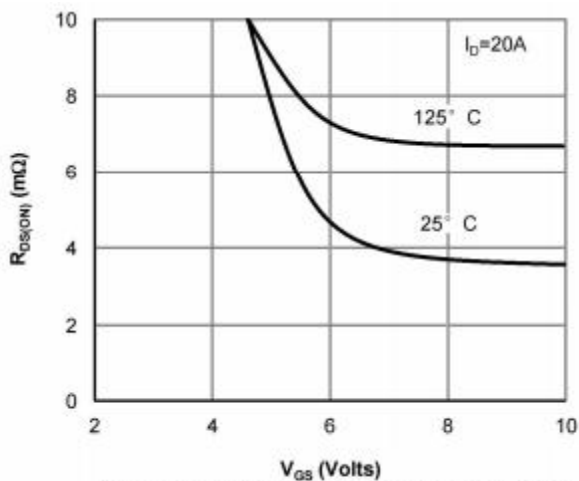


Figure 5: On-Resistance vs. Gate-Source Voltage

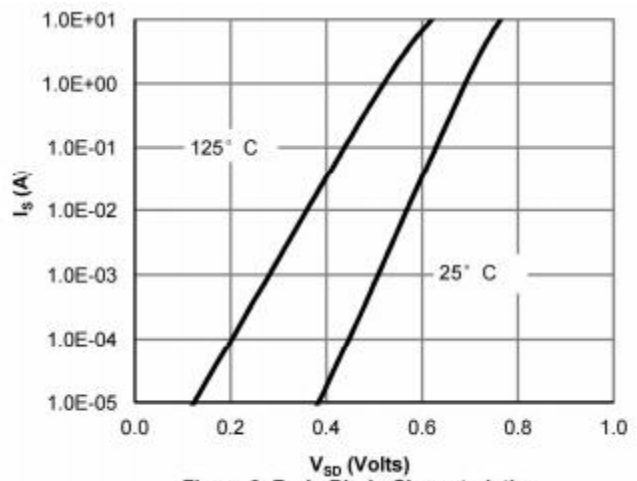


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

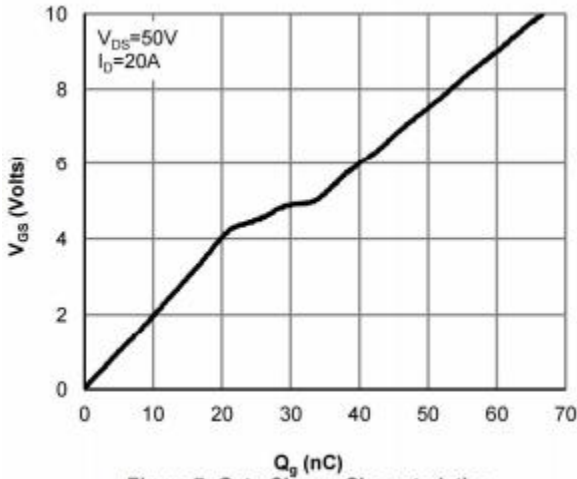


Figure 7: Gate-Charge Characteristics

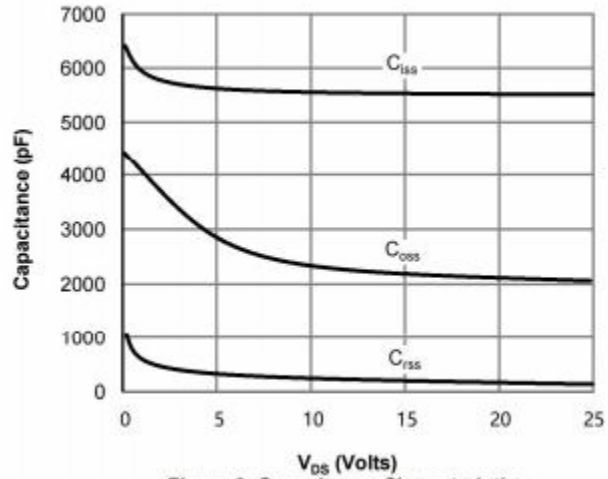


Figure 8: Capacitance Characteristics

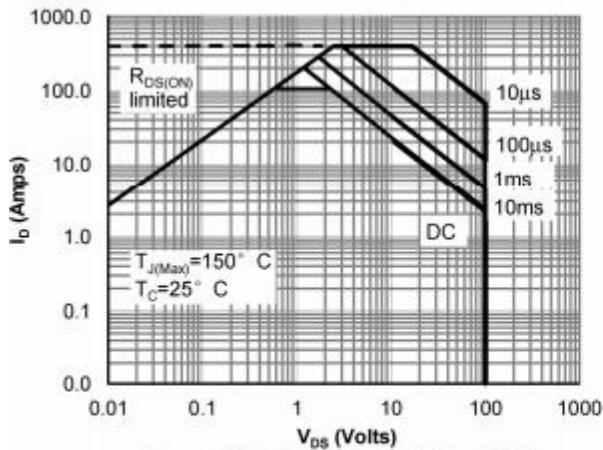


Figure 9: Maximum Forward Biased Safe Operating Area

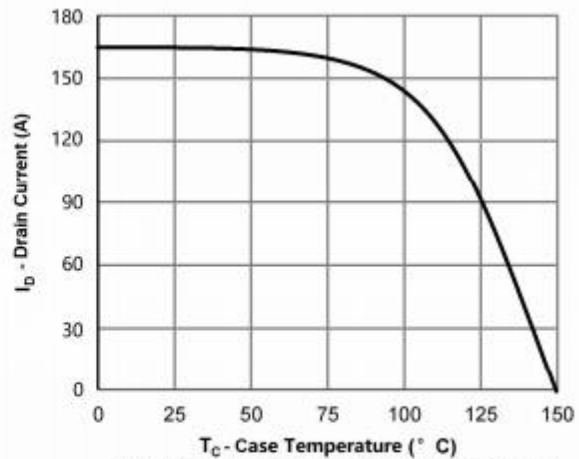


Figure 10: Maximum Continuous Drain Current vs Case Temperature


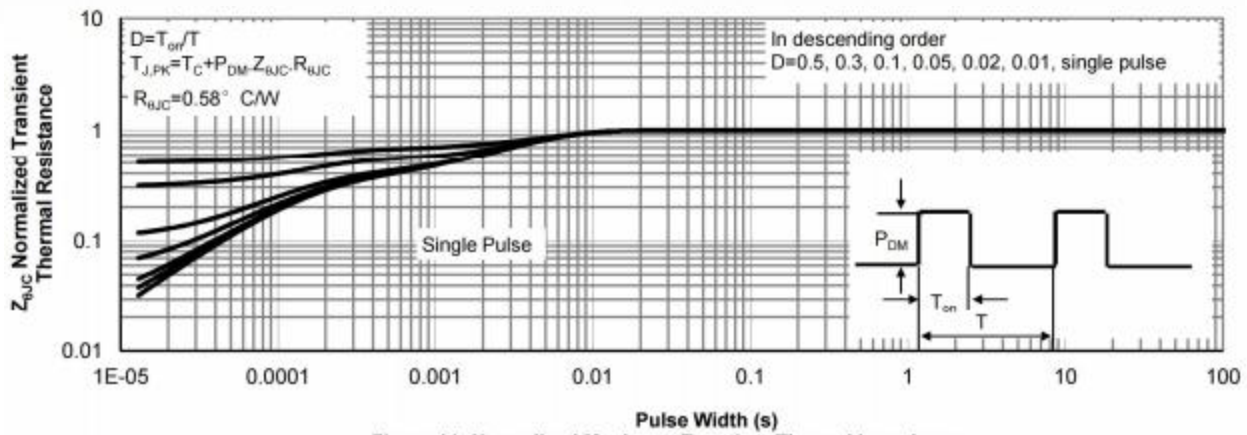


Figure 11: Normalized Maximum Transient Thermal Impedance

Marking Instruction

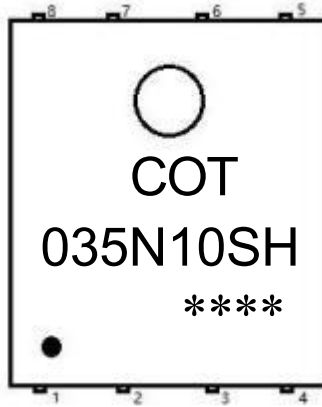

Note:

COT: Company Code.

035N10SH: Product Type.

****: Lot No. Code, code change with Lot No.

Packaging SPEC.


REEL

Package Type	Units					Dimension (unit: mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
PDFN5×6	5000	2	10000	6	60000	13" × 12	360 × 360 × 50	380 × 335 × 366

Package Outline Dimensions

PDFN5 X6

Unit:mm

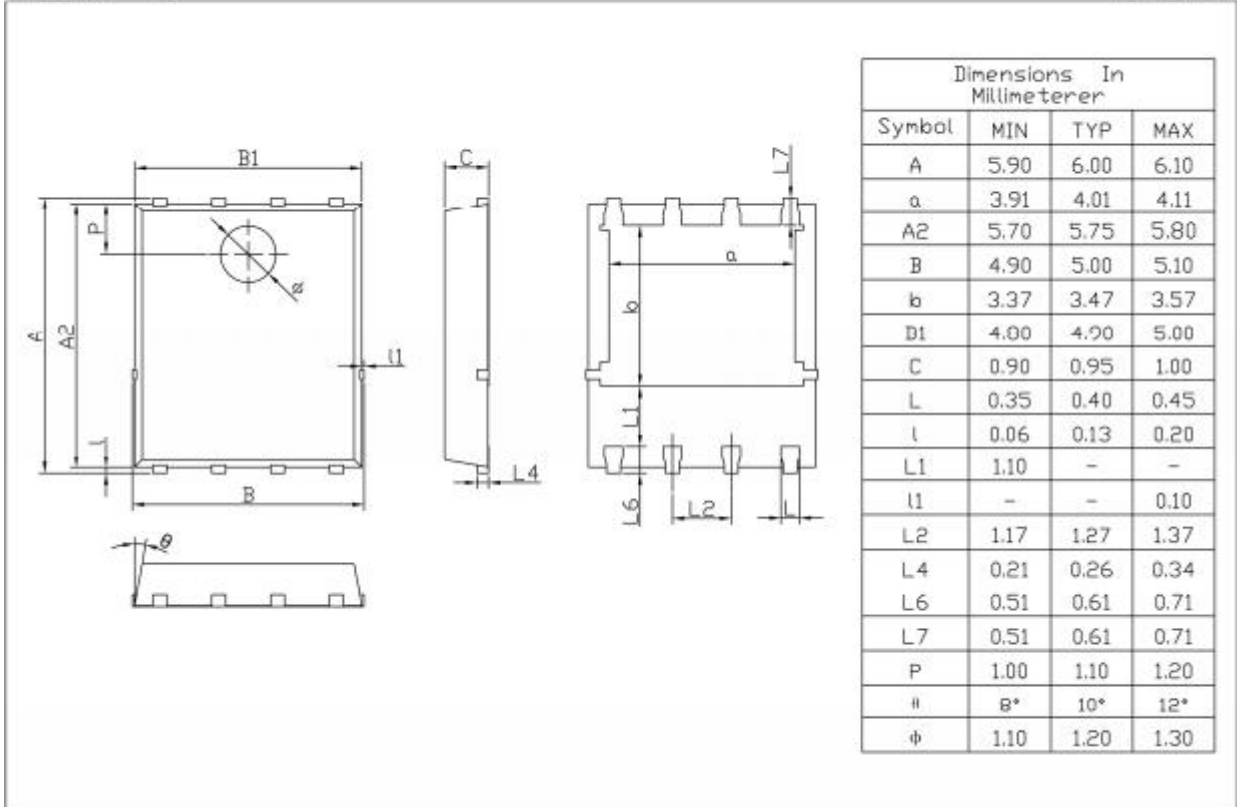

Rev.00 201812