

Description

This 100V 180A N-Channel mosfet in a TO-220 Plastic Package.

Applications



- High frequency switching and synchronous rectification
- BMS
- Motor

Features

- Ultra Low On-Resistance
- Fast switching

V_{DS}	$R_{DS(ON)}$ Typ	I_D
100 V	3.5 m Ω	180A

Equivalent Circuit & Pinning

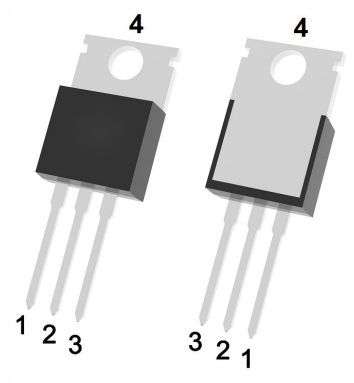

PIN1: G

PIN 2、4 : D

PIN 3: S

Marking

See Marking Instructions.

Absolute Maximum Ratings(Ta=25°C)

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	100	V
Drain Current		$I_D(T_c=25^\circ\text{C})$	180	A
Pulsed Drain Current		I_{DM}	385	A
Gate-Source Voltage		V_{GS}	± 20	V
Single Pulsed Avalanche Energy(L=0.5mH)		E_{AS}	563	mJ
Avalanche Current		I_{AS}	37.5	A
Total Power Dissipation		$P_D(T_c=25^\circ\text{C})$	237	W
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C
Thermal Resistance-Junction to Ambient	$t \leq 10s$	$R_{\theta JA}$	17.7	°C/W
	Steady-State		70.7	
Thermal Resistance-Junction to Case	Steady-State	$R_{\theta JC}$	0.53	

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$	$I_D=250\mu A$	100	112		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100V$	$V_{GS}=0V$			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$	$V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$	$I_D=250\mu A$	2	2.9	4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$	$I_D=20A$		3.5	4.0	m Ω
Forward On Voltage	V_{SD}	$V_{GS}=0V$	$I_S=1A$			1.2	V
Gate resistance	R_g	$f=1MHz$			1.7		Ω
Input Capacitance	C_{iss}	$V_{DS}=25V$ $f=1MHz$	$V_{GS}=0V$		5550		pF
Output Capacitance	C_{oss}				2050		
Reverse Transfer Capacitance	C_{rss}				180		
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V,$ $I_D=20A$	$V_{DS}=50V,$		80		nC
Gate Source Charge	Q_{gs}				23		
Gate Drain Charge	Q_{gd}				17		

Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=2.5\Omega$ $R_{GEN}=3\Omega$		25		ns
Turn-On Rise Time	t_r			17		
Turn-Off Delay Time	$t_{d(off)}$			53		
Turn-Off Fall Time	t_f			24		

Electrical Characteristic Curve

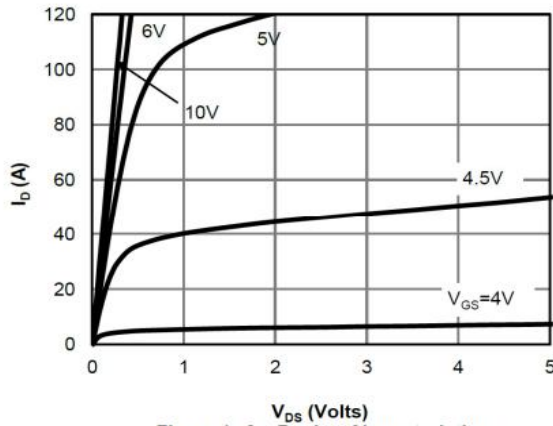


Figure 1: On-Region Characteristics

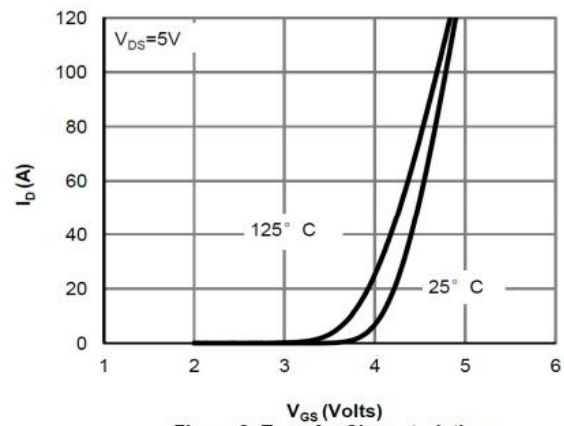


Figure 2: Transfer Characteristics

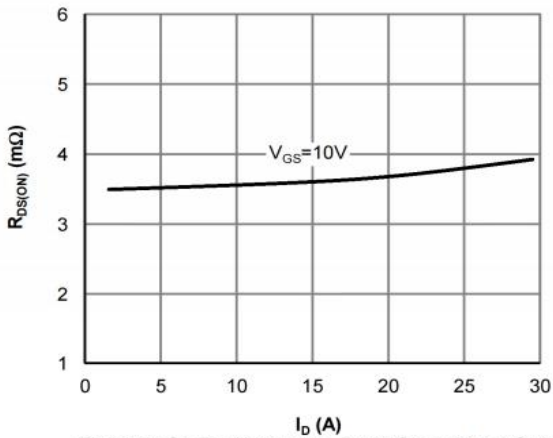


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

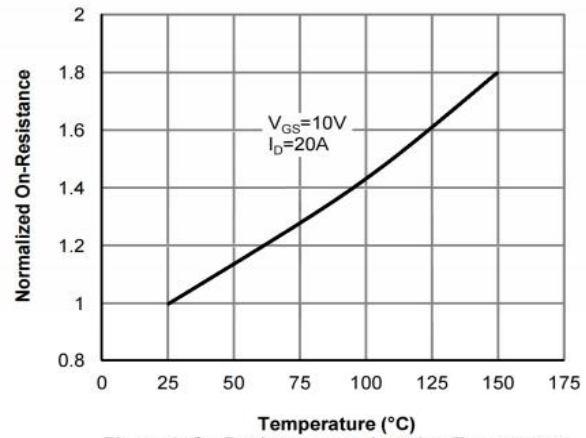


Figure 4: On-Resistance vs. Junction Temperature

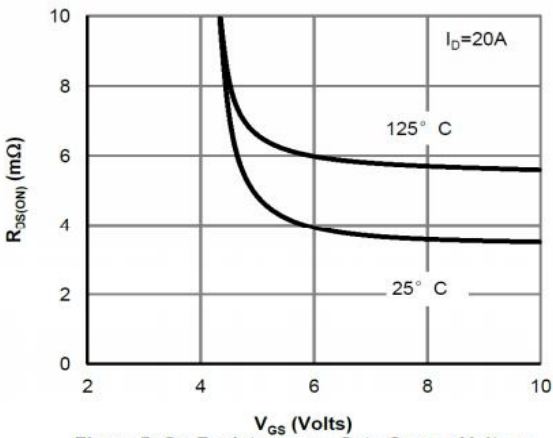


Figure 5: On-Resistance vs. Gate-Source Voltage

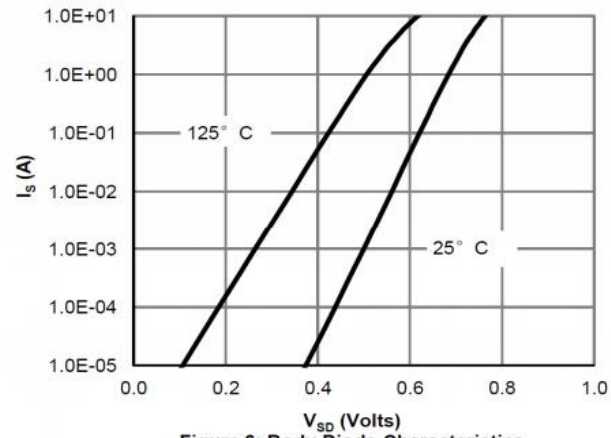


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

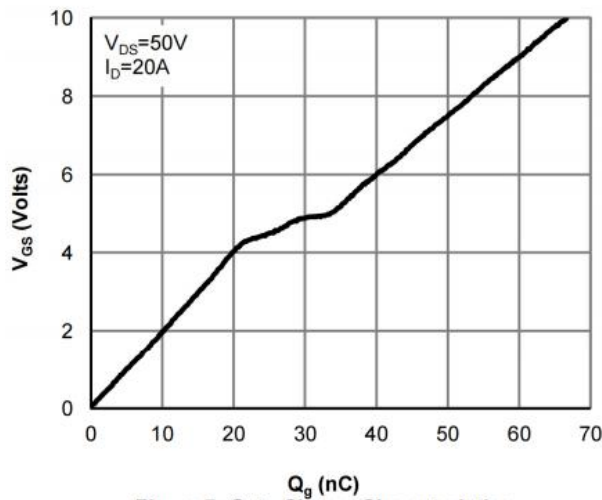


Figure 7: Gate-Charge Characteristics

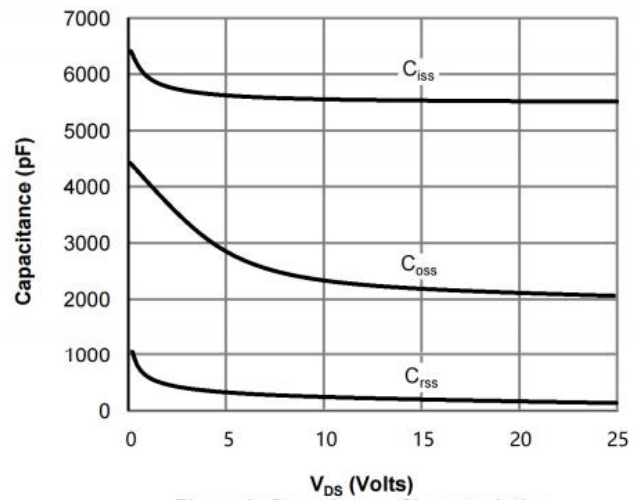


Figure 8: Capacitance Characteristics

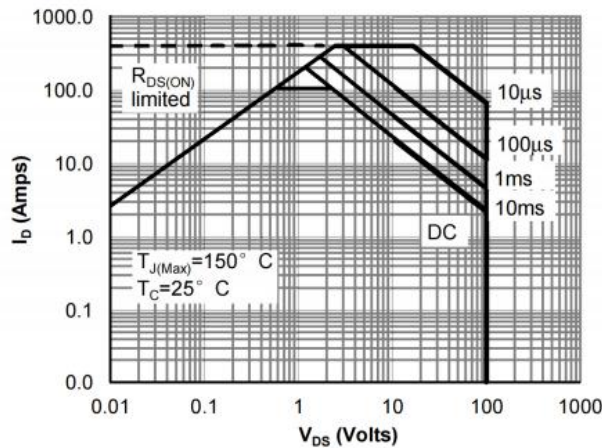


Figure 9: Maximum Forward Biased Safe Operating Area

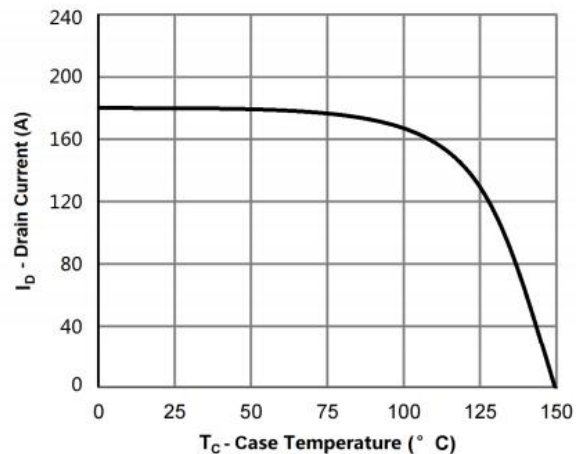


Figure 10: Maximum Continuous Drain Current vs Case Temperature


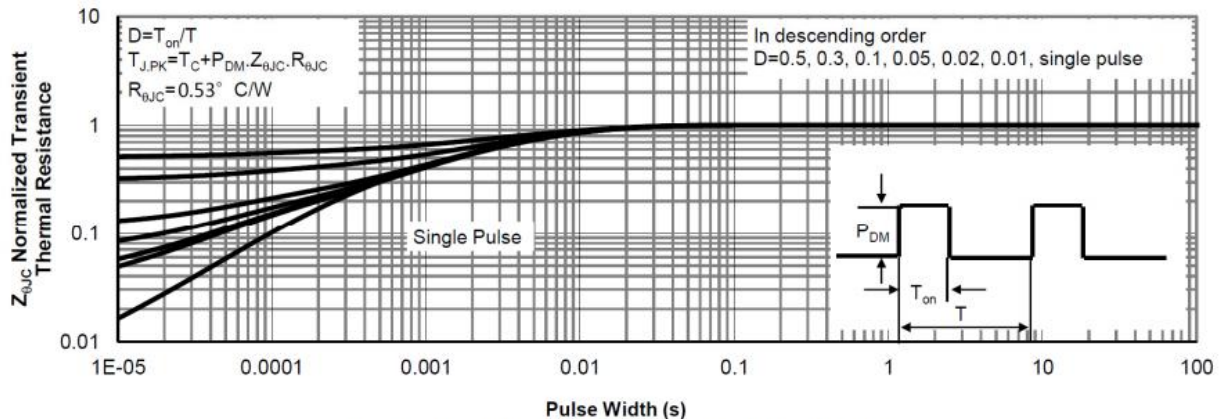


Figure 11: Normalized Maximum Transient Thermal Impedance

Marking Instruction

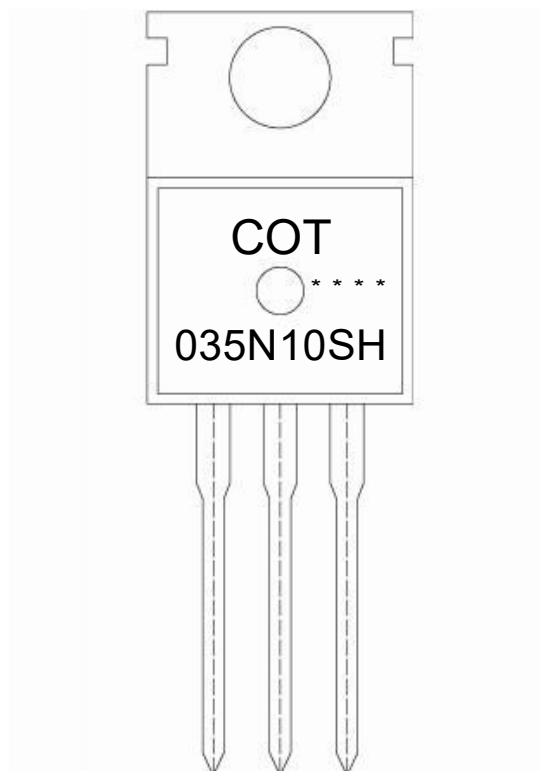

Note:

COT: Company Code

035N10SH: Product Type

****: Lot No. Code, code change with Lot No

Packaging SPEC.

BULK

Package Type	Units					Dimension(unit: mm ³)		
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

TUBE

Package Type	Units					Dimension (unit: mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

Package Outline Dimensions

T□-220

单位: mm

