

## Descriptions

This 30V 6.9A N-Channel Enhancement Mode Field Effect Transistor in a SOP-8 Plastic Package.


## Features

- $V_{DS}(V)=30V$   $I_D=6.9A$
- $R_{DS(ON)} < 32m\Omega (V_{GS}=10V)$
- $R_{DS(ON)} < 36m\Omega (V_{GS}=4.5V)$
- $R_{DS(ON)} < 52m\Omega (V_{GS}=2.5V)$


## Applications

Power Management in Notebook computer, Portable Equipment and Battery powered systems and this device is suitable for use as a load switch or in PWM applications.

## Equivalent Circuit

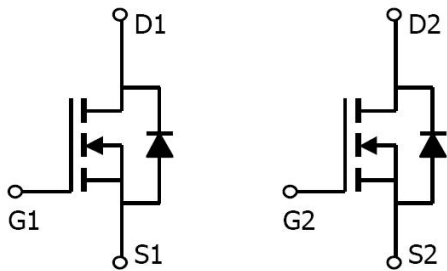

## Pinning



PIN1: S2	PIN 2: G2	PIN 3: S1	PIN 4: G1
PIN 5: D1	PIN 6: D1	PIN 7: D2	PIN 8: D2

## Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current <sup>A</sup>	$I_D (T_a=25^\circ\text{C})$	6.9	A
	$I_D (T_a=70^\circ\text{C})$	5.8	A
Pulsed Drain Current <sup>B</sup>	$I_{DM}$	40	A
Power Dissipation for Single Operation <sup>A</sup>	$P_D (T_a=25^\circ\text{C})$	2.0	W
	$P_D (T_a=70^\circ\text{C})$	1.44	W
Junction and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150	°C
Thermal Resistance-Junction to Ambient <sup>A</sup>	$R_{\theta JA} (t \leq 10s)$	62.5	°C/W
	$R_{\theta JA}$	110	°C/W
Maximum Junction-to-Lead <sup>C</sup>	$R_{\theta JL}$	40	°C/W

## Note:

A: The value of  $R_{\theta JA}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The value in any a given application depends on the user's specific board design. The current rating is based on the  $t \leq 10s$  thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The  $R_{\theta JA}$  is the sum of the thermal impedance from junction to lead  $R_{\theta JL}$  and lead to ambient.







D. The static characteristics in Figures 1 to 6 are obtained using 80  $\mu s$  pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The SOA curve provides a single pulse rating.






Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$I_D=250\mu A$ $V_{GS}=0V$	30			V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=24V$ $V_{GS}=0V$			1.0	$\mu A$
		$V_{DS}=24V$ $V_{GS}=0V$ $T_J=55^\circ C$			5.0	
Gate-Body leakage current	$I_{GSS}$	$V_{DS}=0V$ $V_{GS}=\pm 12V$			$\pm 100$	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	0.7	1.1	1.4	V
On state drain current	$I_{D(ON)}$	$V_{GS}=4.5V$ $V_{DS}=5.0V$	6.9			A
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V$ $I_D=6.9A$		24	32	m $\Omega$
		$V_{GS}=10V$ $I_D=6.9A$ $T_J=125^\circ C$		32.3	38	
		$V_{GS}=4.5V$ $I_D=6.0A$		27	36	
		$V_{GS}=2.5V$ $I_D=5.0A$		40	52	
Forward Transconductance	$g_{FS}$	$V_{DS}=5.0V$ $I_D=5.0A$	10	15		S
Diode Forward Voltage	$V_{SD}$	$I_S=1.0A$		0.77	1.0	V
Maximum Body-Diode Continuous Current	$I_S$				3.0	A
Total Gate Charge	$Q_g$	$V_{GS}=4.5V$ $V_{DS}=15V$ $I_D=6.9A$		9.6		nC
Gate-Source Charge	$Q_{gs}$			1.65		
Gate-Drain Charge	$Q_{gd}$			3.0		
Gate Resistance	$R_g$	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		1.24		$\Omega$
Input Capacitance	$C_{iss}$	$V_{GS}=0V$ $V_{DS}=15V$ $f=1MHz$		858		pF
Output Capacitance	$C_{oss}$			110		
Reverse Transfer Capacitance	$C_{rss}$			80		
Turn-on Delay Time	$t_{d(ON)}$	$V_{GS}=10V$ $V_{DS}=15V$ $R_L=2.2\Omega$ $R_{GEN}=6.0\Omega$		5.7		ns
Turn-on Rise Time	$t_r$			13		
Turn-off Delay Time	$t_{d(OFF)}$			37		
Turn-off Fall Time	$t_f$			4.2		
Body Diode Reverse Recovery Time	$t_{rr}$	$I_F=5.0A$ $di/dt=100A/\mu s$		15.5		ns
Body Diode Reverse Recovery Charge	$Q_{rr}$	$I_F=5.0A$ $di/dt=100A/\mu s$		7.9		nC


Electrical Characteristic Curve

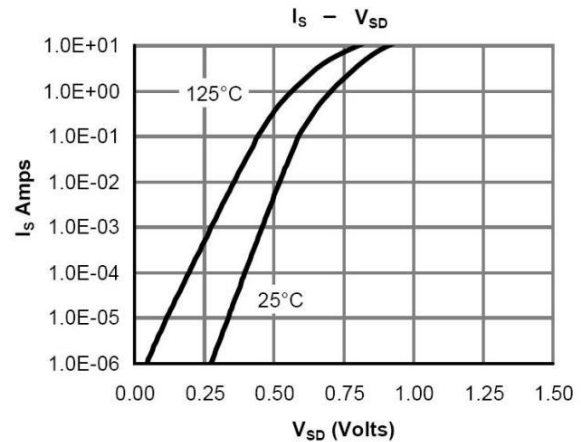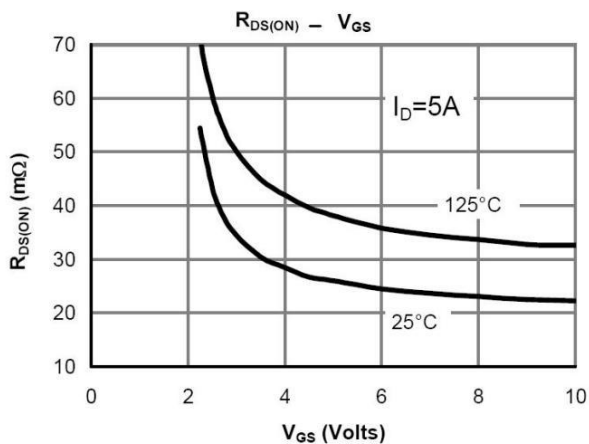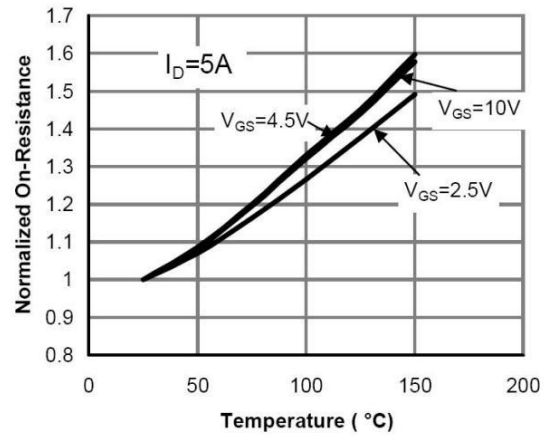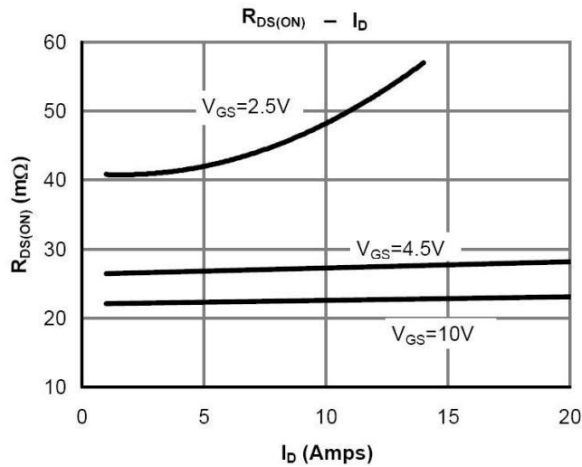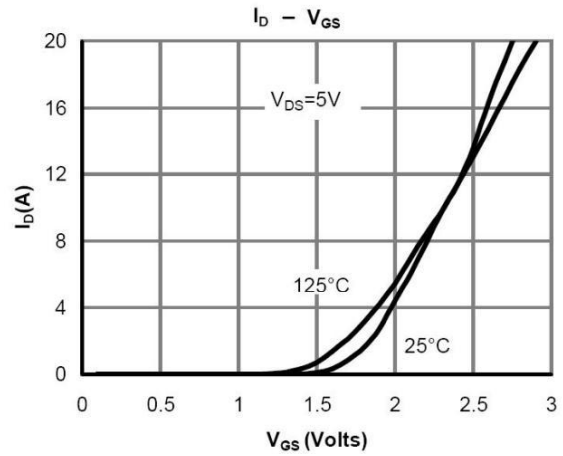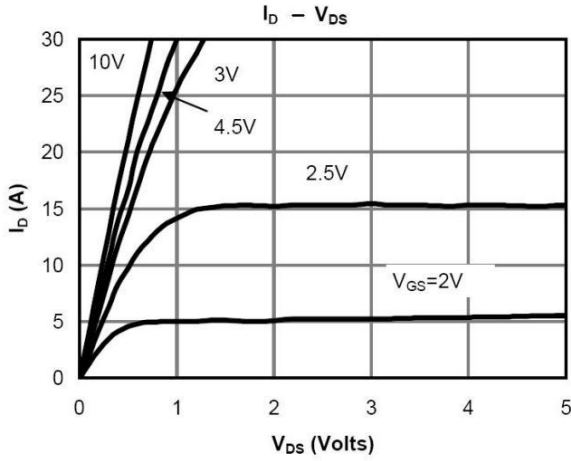

Electrical Characteristic Curve

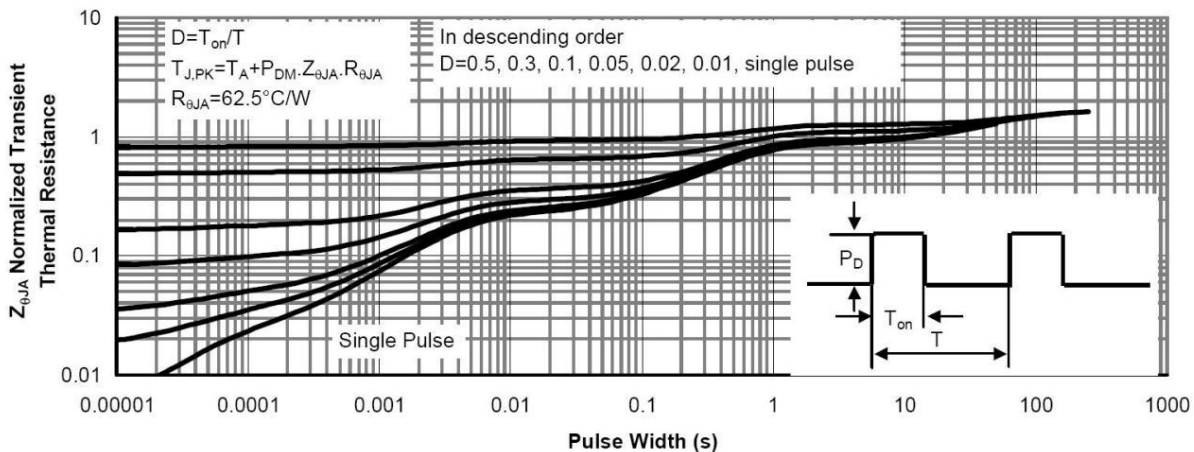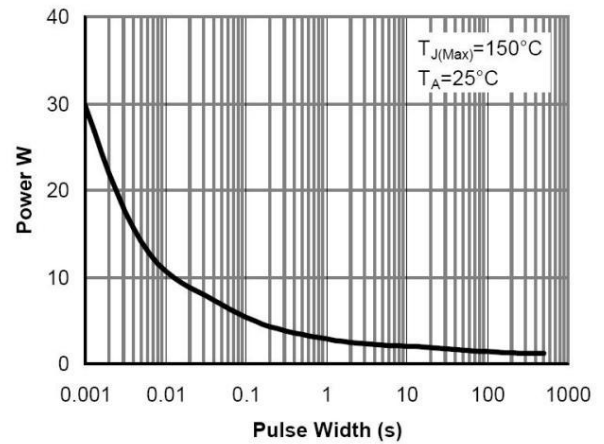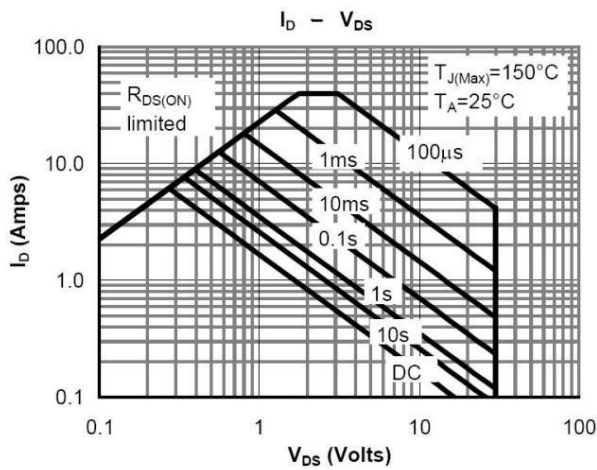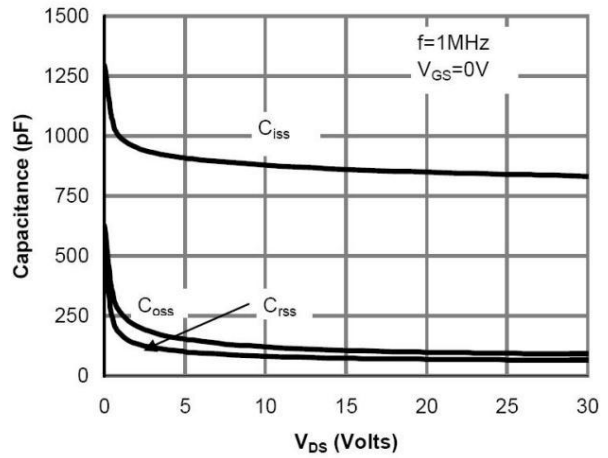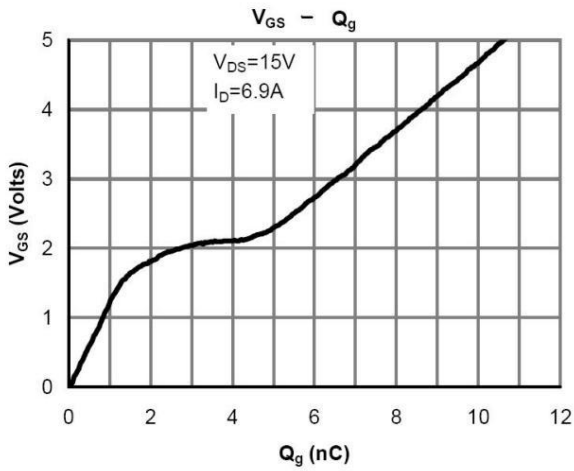

**Marking Instructions**

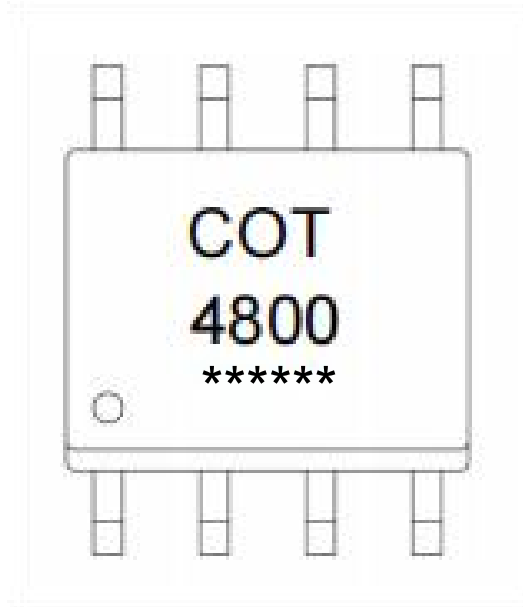

Note:

COT: Company Logo

4800: Product Type.

\*\*\*\*\*: Lot No. Code, code change with Lot No.

**Packaging SPEC**

REEL INFORMATION

Package Type	Units					Dimension (unit: mm <sup>3</sup> )		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOP-8	4,000	2	8,000	6	48,000	13" x12	360x360x50	380x335x366

**Package Outline Dimensions**

SOP-8

Unit:mm

