

## Descriptions

CT65R380CD is N-CHANNEL 650V Super-Junction Power MOSFET in a TO-252 Plastic Package.


## Features

- Low RDS(on)
- Low gate charge
- Low Crss
- Fast switching
- Halogen-free product


## Applications

- Suited for low voltage applications such as automotive
- DC/DC Converters
- High efficiency switching for power management in portable and battery operated products.

## Equivalent Circuit



## Pinning



PIN1: G    PIN 2: D    PIN 3: S    PIN 4: D

## Marking

See Marking Instructions.

**Absolute Maximum Ratings(Ta=25°C)**

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	650	V
Drain Current	$I_D(T_C=25^\circ C)$	11	A
Drain Current - Pulsed	$I_{DM}$	44	A
Gate-Source Voltage	$V_{GS}$	$\pm 30$	V
Single Pulsed Avalanche Energy	$E_{AS}$	277	mJ
Avalanche Current	$I_{AS}$	8	A
Power Dissipation	$P_D(T_C=25^\circ C)$	125	W
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C
Junction-to-Case	$R_{\theta JC}$	1	°C/W
Junction-to-Ambient	$R_{\theta JA}$	55	°C/W

**Electrical Characteristics(Ta=25°C)**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V$ $I_D=250\mu A$	650	700		V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=650V$ $V_{GS}=0V$ $T_J=25^\circ C$			1.0	$\mu A$
Gate-Body Leakage Current, Forward	$I_{GSS}$	$V_{GS}=\pm 30V$			$\pm 100$	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.5	3.3	4.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=5.5A$		320	380	m $\Omega$
Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V$ $I_{SD}=1A$ $T_J=25^\circ C$			1.2	V
Gate Resistance	$R_g$	$V_{GS} = 0V$ $f = 1.0MHz$		4.1		$\Omega$
Input Capacitance	$C_{iss}$	$V_{DS}=100V$ $V_{GS}=0V$ $f=1.0MHz$		735		pF
Output Capacitance	$C_{oss}$			35		pF
Reverse Transfer Capacitance	$C_{rss}$			0.45		pF
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=400V$ $I_D=5.5A$ $R_G=25\Omega$ $V_{GS}=10V$		16.3		ns
Turn-On Rise Time	$t_r$			35		ns
Turn-Off Delay Time	$t_{d(off)}$			78		ns
Turn-Off Fall Time	$t_f$			39.5		ns

## Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Diode Forward Current	$I_S$				11	A
Total Gate Charge	$Q_g$	$V_{DS}=480V$ $I_D=5.5A$ $V_{GS}=10V$		19.2		nC
Gate-Source Charge	$Q_{gs}$			3.1		nC
Gate-Drain Charge	$Q_{gd}$			8.2		nC
Reverse recovery time	$T_{rr}$	$V_R=400V$ , $I_F=5.5A$ , $di_F/dt=100A/\mu s$		310		ns
Reverse recovery charge	$Q_{rr}$			2.8		$\mu C$

Electrical Characteristic Curve

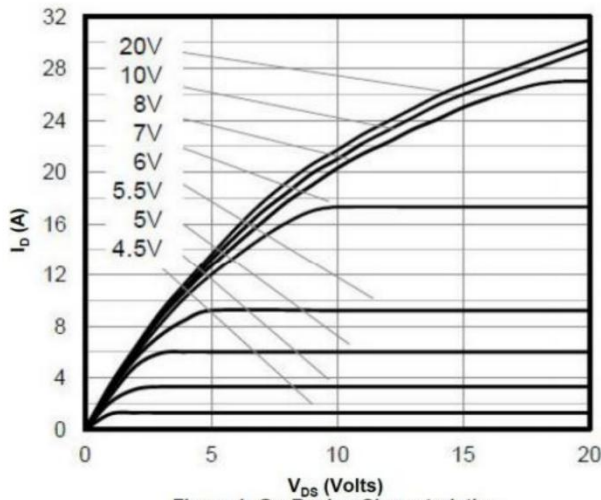


Figure 1: On-Region Characteristics

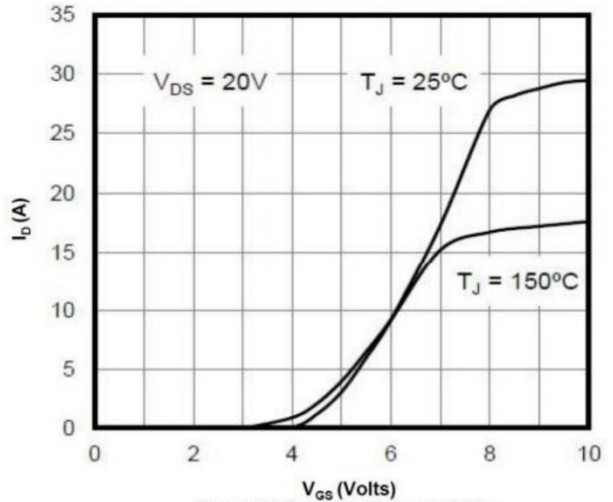


Figure 2: Transfer Characteristics

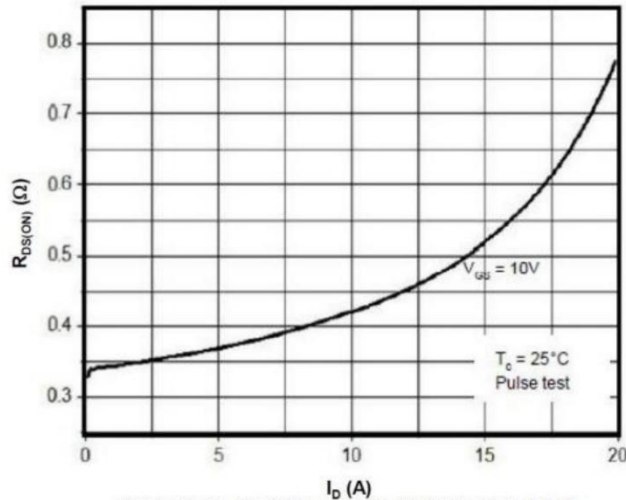


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

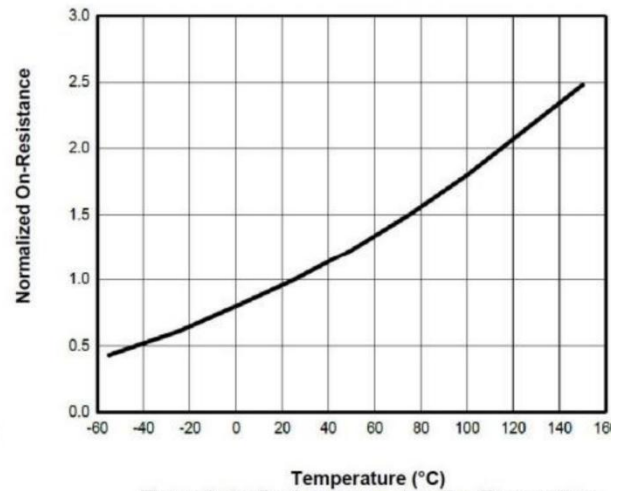


Figure 4: On-Resistance vs. Junction Temperature

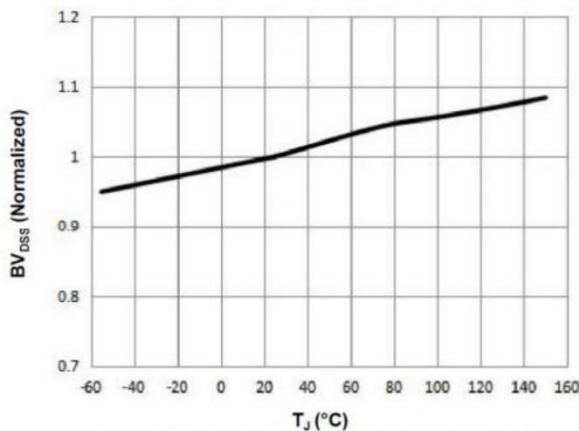


Figure 5: Break Down vs. Junction Temperature

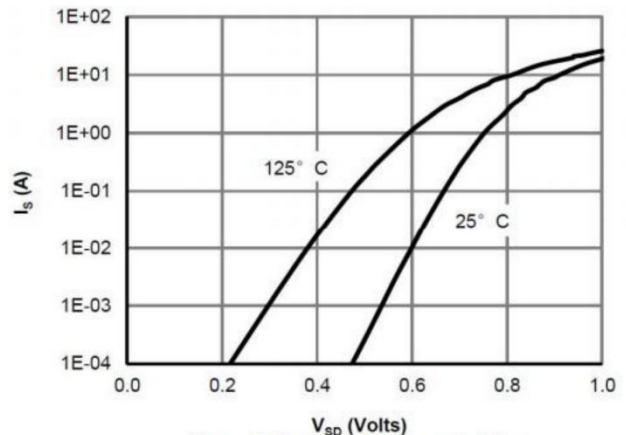


Figure 6: Body-Diode Characteristics

Electrical Characteristic Curve

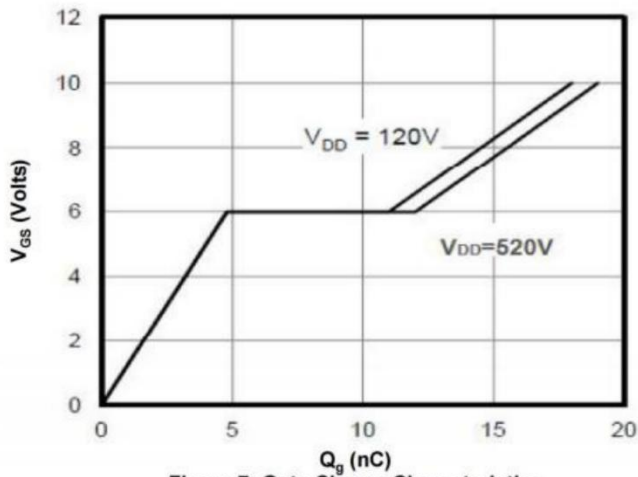


Figure 7: Gate-Charge Characteristics

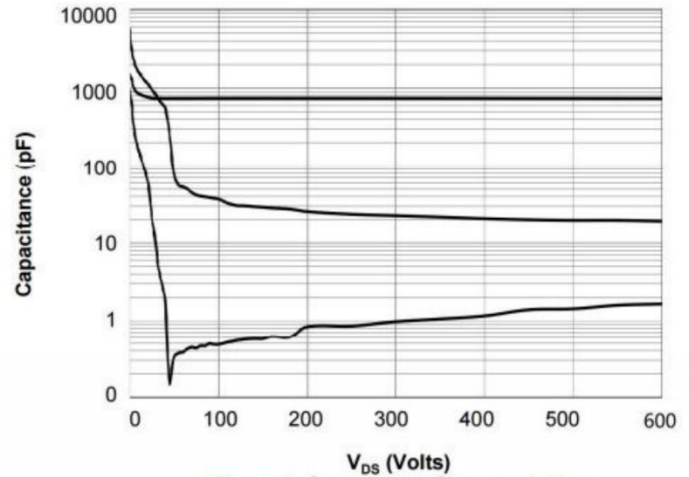


Figure 8: Capacitance Characteristics

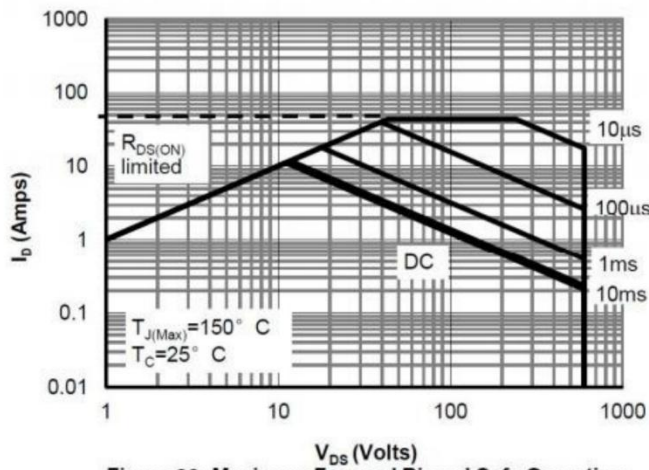


Figure 09: Maximum Forward Biased Safe Operating Area

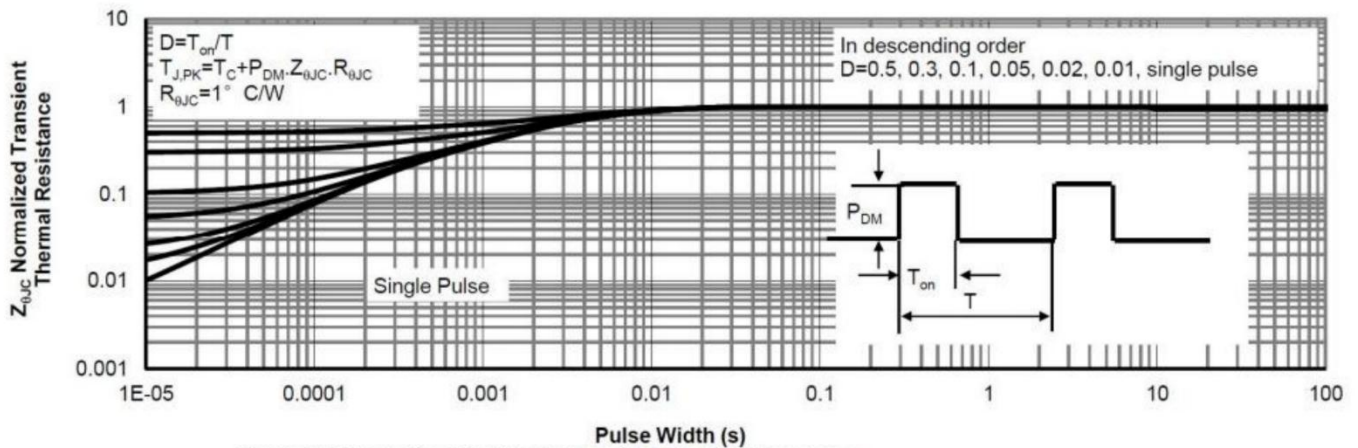


Figure 10: Normalized Maximum Transient Thermal Impedance

**Marking Instructions**



Note:  
 COT: Company Code  
 65R380C: Product Type Code  
 \*\*\*\*: Lot No. Code, code change with Lot No


**Packaging SPEC.**

**BULK AND TUBE INFOMATIONS**

Package Type	Units					Dimension (unit: mm <sup>3</sup> )		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

Package Type	Units					Dimension (unit: mm <sup>3</sup> )		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

Package Outline Dimensions

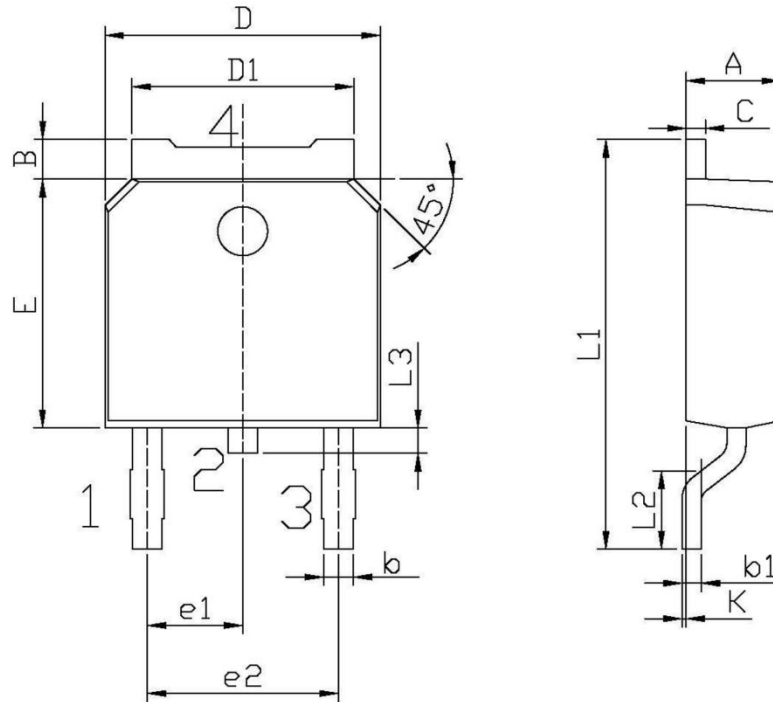

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

TO-252