

## Descriptions

This is Silicon NPN transistor in a SOT-23 Plastic Package


## Features

- High  $I_c$
- Complementary pair with BC807
- Halogen-free product

## Applications

Purpose: General power amplifier and switching application

## Equivalent Circuit & Pinning

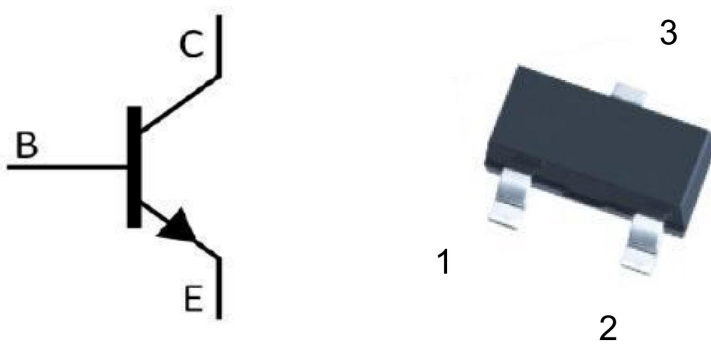

PIN1: Base    PIN 2: Emitter    PIN 3: Collector

## hFE Classifications & Marking

h <sub>FE</sub> Classifications Symbol	16	25	40
h <sub>FE</sub> Range	100~250	160~400	250~600
Marking	H6A	H6B	H6C





## Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	50	V
Collector to Emitter Voltage	$V_{CEO}$	45	V
Emitter to Base Voltage	$V_{EBO}$	5.0	V
Collector Current - Continuous	$I_C$	500	mA
Collector Current - peak collector current	$I_{CM}$	1.0	A
Collector Power Dissipation	$P_C$	250	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55~150	°C


## Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	$V_{CBO}$	$I_C=10\mu A$ $I_E=0$	50			V
Collector to Emitter Breakdown Voltage	$V_{CEO}$	$I_C=10mA$ $I_B=0$	45			V
Emitter to Base Breakdown Voltage	$V_{EBO}$	$I_E=10\mu A$ $I_C=0$	5.0			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=20V$ $I_E=0$			0.1	$\mu A$
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=5.0V$ $I_E=0$			0.1	$\mu A$
DC Current Gain	$h_{FE(1)}$	$V_{CE}=1.0V$ $I_C=100mA$	100		600	
	$h_{FE(2)}$	$V_{CE}=1.0V$ $I_C=500mA$	40			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA$ $I_B=50mA$			0.7	V
Base to Emitter Voltage	$V_{BE}$	$V_{CE}=1.0V$ $I_C=500mA$			1.2	V
Transition Frequency	$f_T$	$V_{CE}=5.0V$ $I_C=10mA$	100			MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ $I_E=0$ $f=1.0MHz$		5.0		pF

Electrical Characteristic Curve

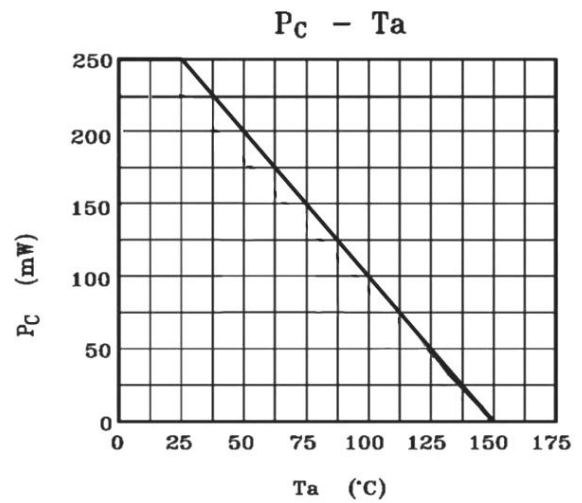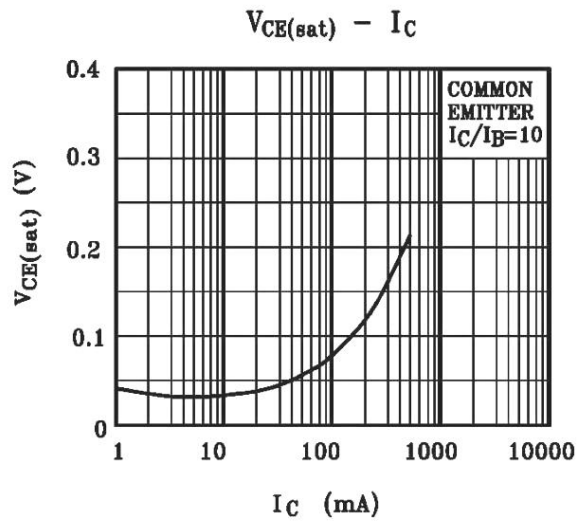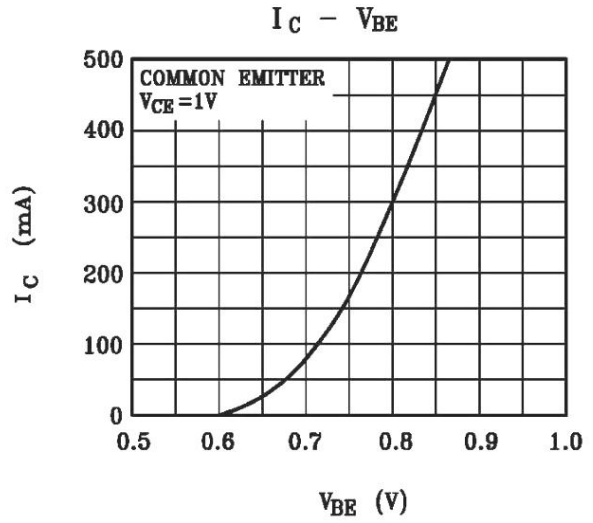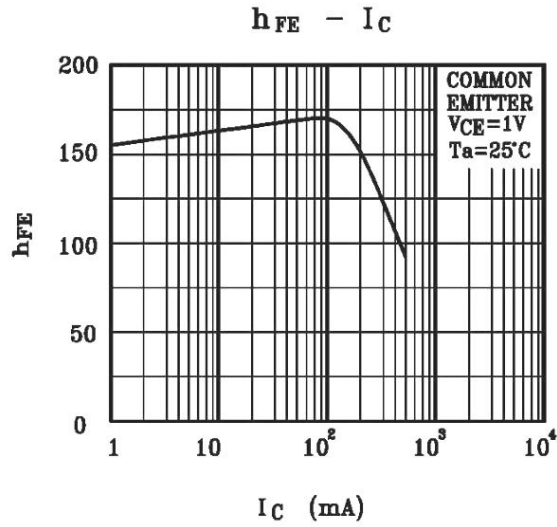

**Marking Instructions**

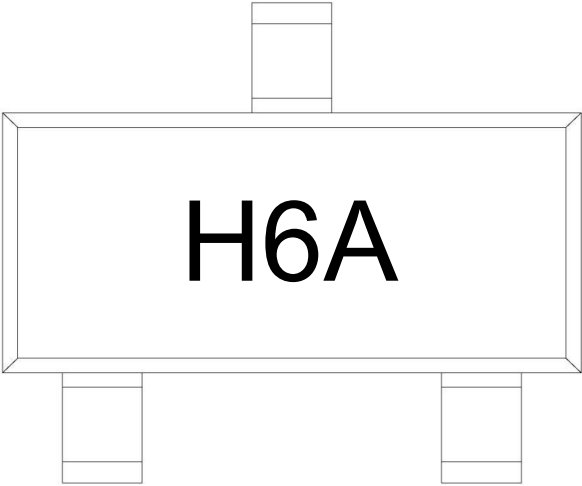

**Note:**  
 H: Company Code.  
 6A: Product Type Code

h <sub>FE</sub> Classifications Symbol	16	25	40
h <sub>FE</sub> Range	100~250	160~400	250~600
Marking	H6A	H6B	H6C

**Packaging SPEC**


REEL INFORMATION

Package Type	Units					Dimension (unit: mm <sup>3</sup> )		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

**Package Dimensions**

SOT-23

单位: mm

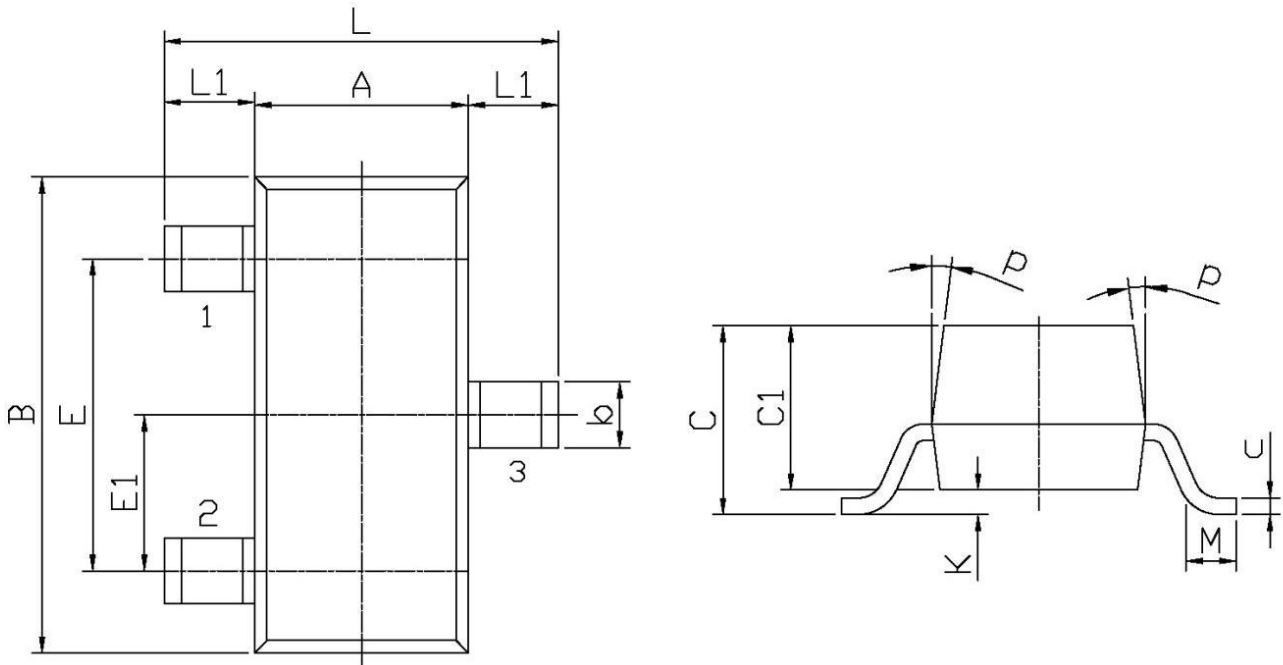

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			